

MATERIAL


■ Heavy-gage anodized aluminum and stainless steel construction

FINISH

- Anodized
- Custom Colors Available

Seiho's Model NTX Wall/Ceiling Mounted TurboNozzle offers excellent architectural styling for directional control in supply applications. Designed specifically for a flush flange mounting to wall and ceiling construction, it provides an integral, readily-accessible, airflow adjustment in its installed position. The NTX differs from the NT in its mounting configuration and the nozzle position. The NTX uses a shallower flange and the nozzle protrudes from the flange. The heavy-gage anodized, aluminum and stainless steel construction is corrosion-resistant for years of service. The aluminum finish integrates seamlessly with the many architectural finish systems.

DIMENSIONS

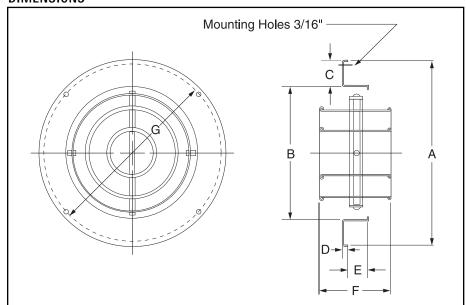

| MODEL | DUCT SIZE | Α | В | С | D | E | F | G |
|--------|--------------|----|----|---|-----|-----|--------|----|
| NTX 4 | 6" | 8 | 4 | 2 | 3/8 | 1 % | 2 | 7 |
| NTX 6 | 8" | 10 | 6 | 2 | 3/8 | 1 % | 3 1/32 | 9 |
| NTX 8 | 10" | 12 | 8 | 2 | 3/8 | 1 % | 4 1/4 | 11 |
| NTX 10 | 12" | 14 | 10 | 2 | 3/8 | 1 % | 5 %2 | 13 |
| NTX 12 | 14" | 16 | 12 | 2 | 3/8 | 1 % | 5 1/32 | 15 |
| NTX 14 | 16" | 18 | 14 | 2 | 3/8 | 1 % | 5 1/32 | 17 |
| NTX 16 | 18" | 20 | 16 | 3 | 3/8 | 1 % | 5 1/32 | 19 |
| NTX 20 | 22" | 24 | 20 | 1 | 3/8 | 2 % | 7 3/16 | 23 |
| NTX 24 | 26" | 28 | 24 | 2 | 3/8 | 2 % | 7 3/16 | 27 |

Note: Dimensions subject to change without notice.

All dimensions in inches.

FEATURES

- Economical
- Contemporary Design
- High Airflow Capacity
- Long Throw Capability
- Wall or Ceiling Mountable
- Infinitely Adjustable 2-Axis Core for
- Directional Control
- Anodized Aluminum Body
- Horizontal Throw
- Vertical Throw Applications by Factory
- Selection
- Mounting Screw Fastening System

Recommended Specification

Air distribution device shall be SEIHO Model NTX Wall/Ceiling Mounted Turbo-Nozzle. The register shall be constructed of three main components consisting of a high strength, anodized, aluminum mounting flange, a two-axis pivoting, aluminum nozzle core, with precise core adjustment (through its range) for precise airflow directional control. The flange shall be designed to mount directly to the plaster ground of a register can in a wall or ceiling. The pivot axis shall be provided with a positive lock between the mounting flange and pivoting nozzle body. The flange mounting system shall have a minimum of four (4) screw holes for flush installation of the device to the wall. Volume control shall be through a field-supplied manual volume damper or air extractor, mounted 3 to 5 equivalent duct diameters upstream of the register.