



LET	DATE	E.C.N.	REVISION RECORD	
	8/10	E-331	PRODUCTION RELEASE	1
A	12/10	E-331	REV. FURN. LDC. W/WHEEL FLARE CHANGE	2
B	2/11	E-331	REV. RANGE VENT LDC.	3
C	10/11	T-03000	REV. RANGE VENT LDC. WAS 85.13	4
D	5/12	T-03122	REV. REFER DOOR HEIGHT 19.00 WAS 19.50	5

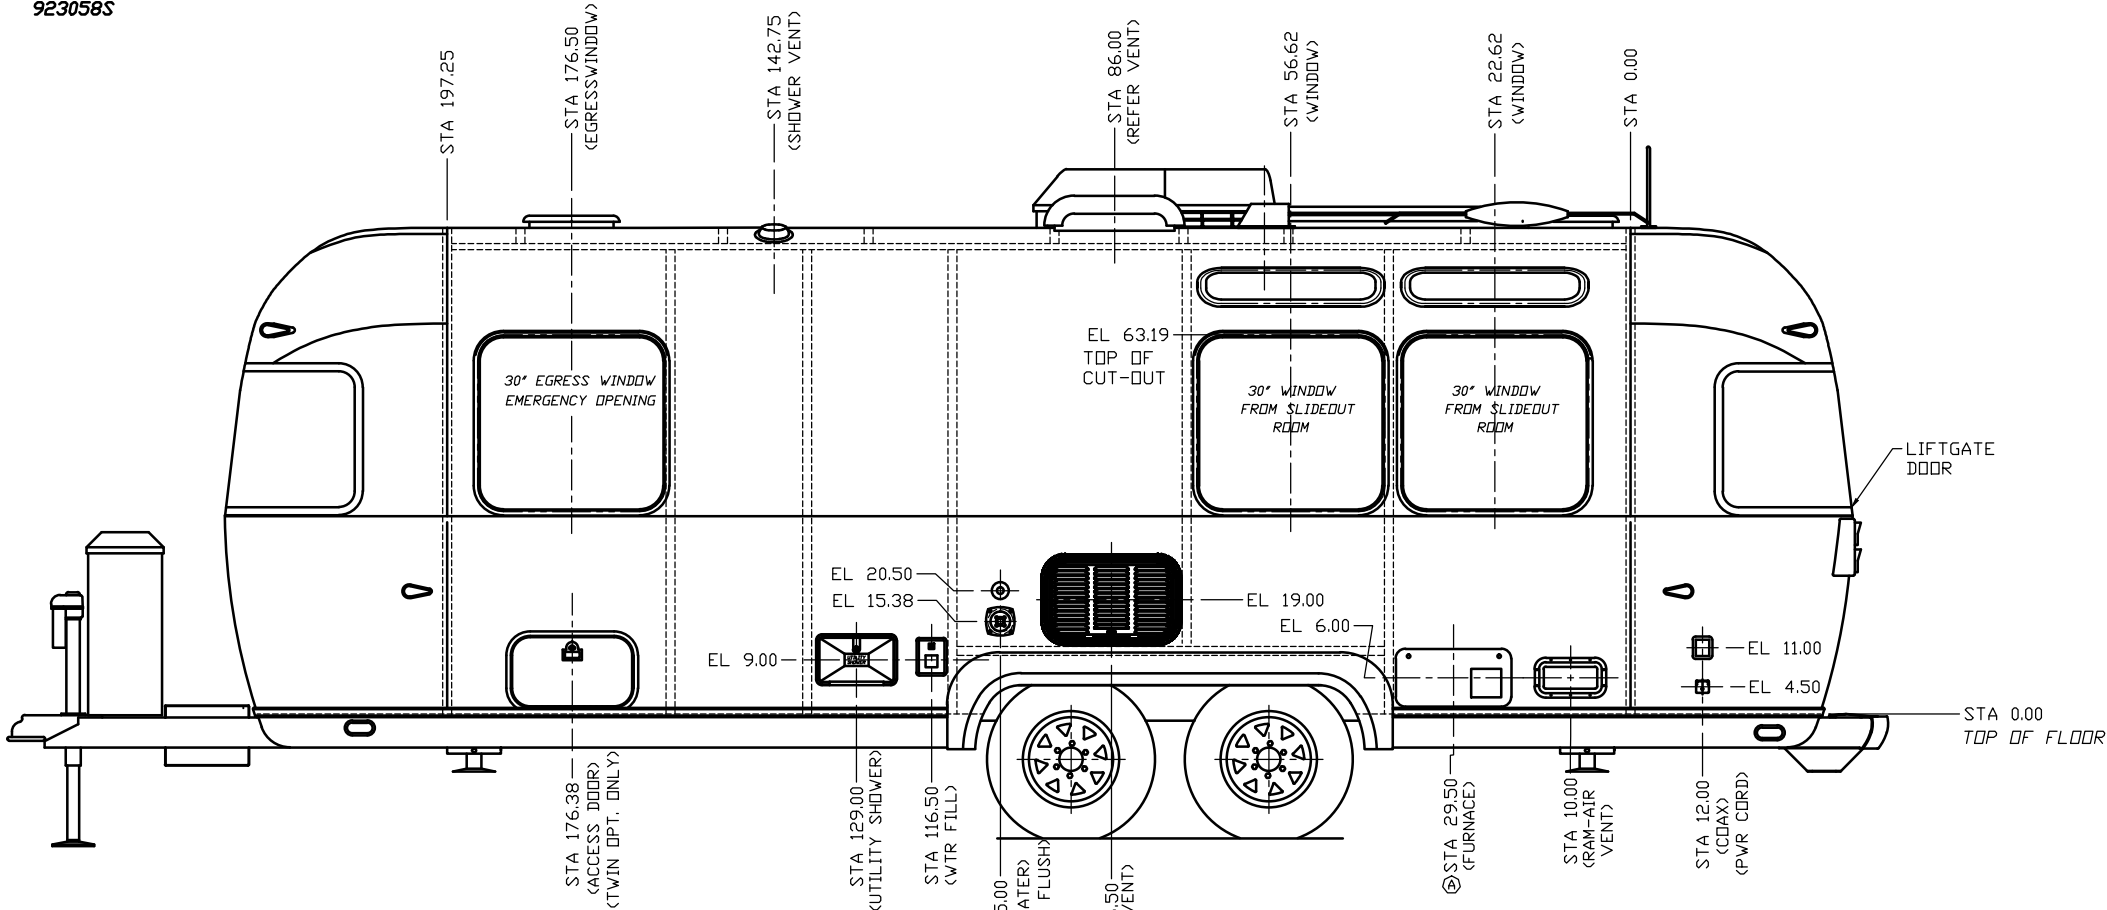


NOTE:
ELEVATION DIMENSIONS ARE
FROM TOP OF FLOOR

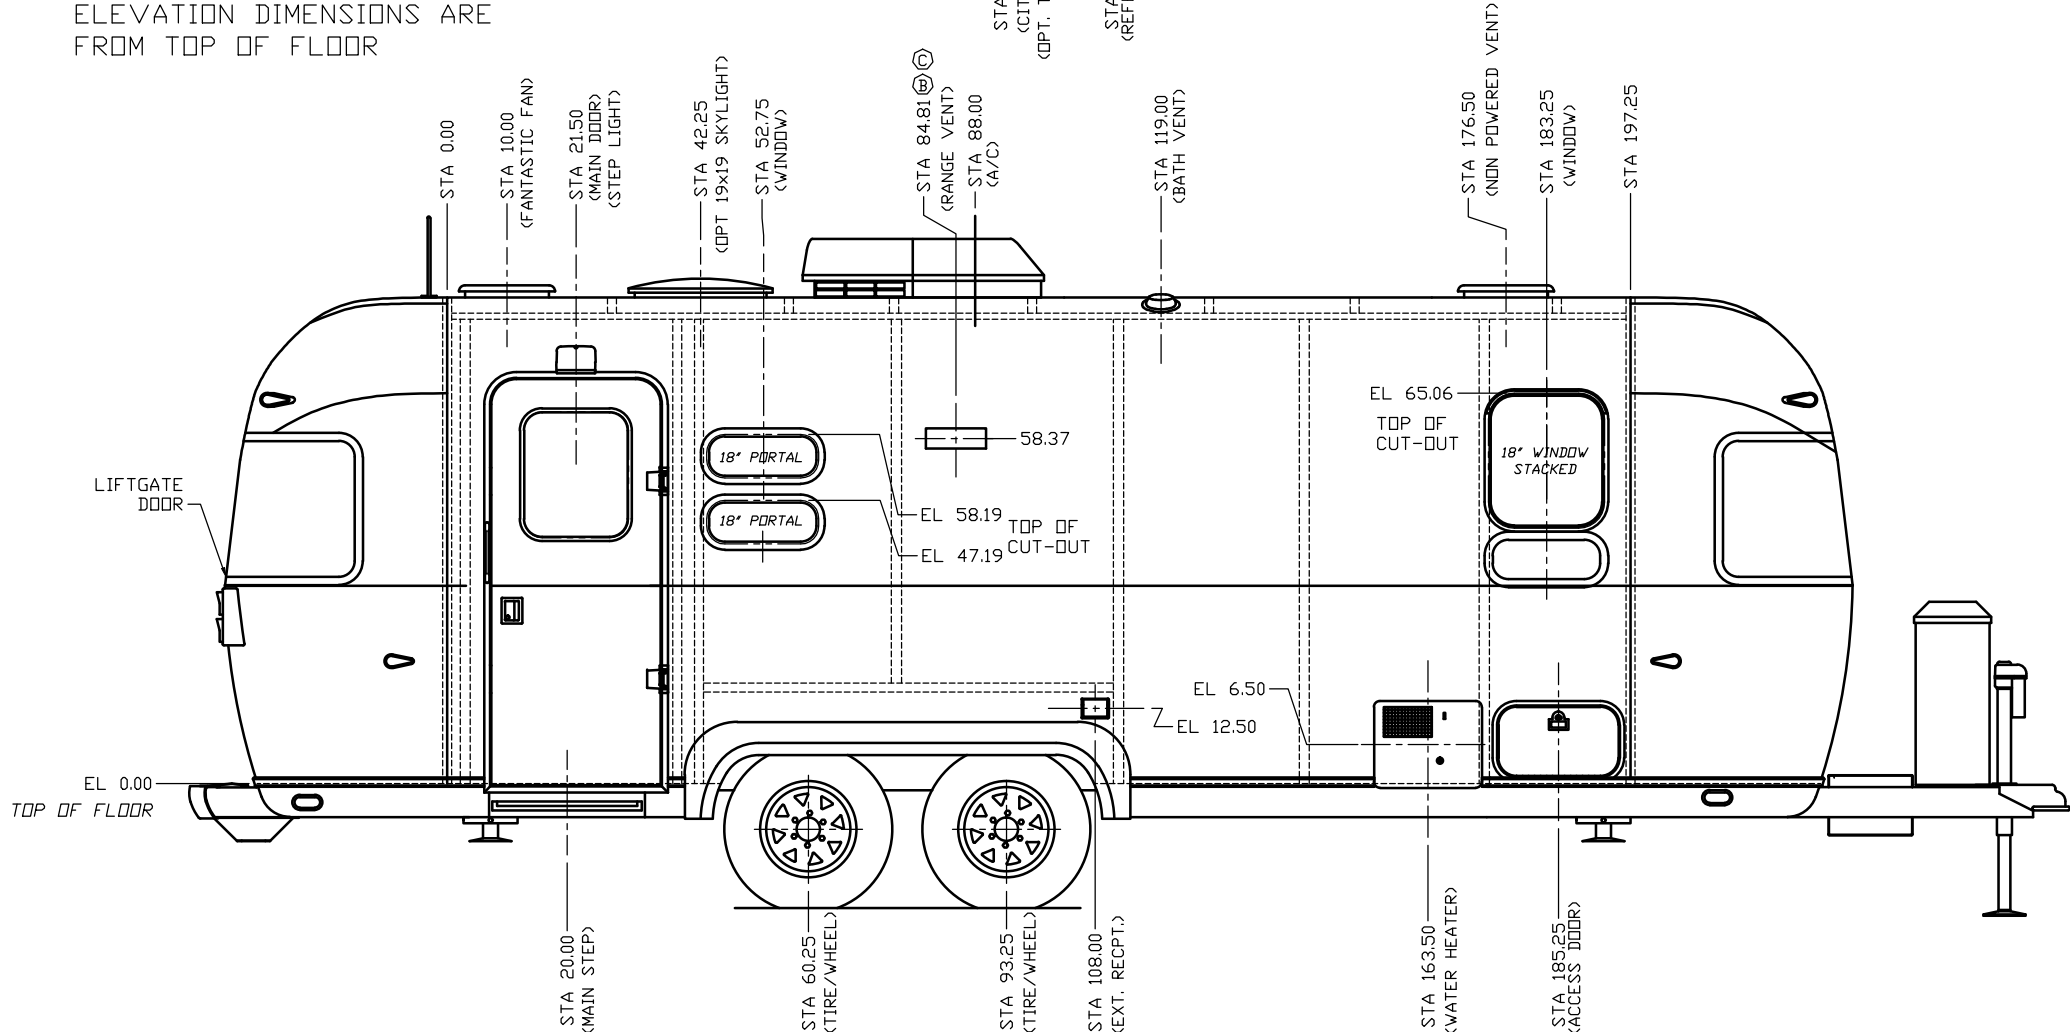

SEE SIDEWALL AND ROOF DRAWINGS
FOR RIB LOCATIONS:

- FLOOR CUT-OUT - 967624
- ROOF ASS'Y - 967628
- R.S. WALL ASS'Y - 967633
- C.S. WALL ASS'Y - 967629
- END SHELL ASSY-FRONT - 921240-01
- END SHELL ASSY - REAR - 923059

ITEM	PART NUMBER	DESCRIPTION	QTY
TOLERANCES ±	Airstream		DRAWN BY JD
NEXT ASS'Y			APPROVED
PRODUCT LINE		25FB EDDIE BAUER	
TITLE ASSEMBLY, SHELL			
SCALE 1=16	DATE 8/31/10	DRAWING NUMBER 923058S	D RE

[illegible]

SEE SIDEWALL AND ROOF DRAWINGS
FOR RIB LOCATIONS:


FLOOR CUT-OUT	-	967624
ROOF ASS'Y	-	967628
R.S. WALL ASS'Y	-	967633
C.S. WALL ASS'Y	-	967629
END SHELL ASSY-FRONT	-	921240-01

ITEM	PART NUMBER	DESCRIPTION
TOLERANCES ±	Airstream	PRODUCT LINE 25FB EDDIE BAUER
NEXT ASSY		
TITLE	ASSEMBLY, SHELL	

510907-03

No.	Ga	Color	Cutting Length	Function
18	14	GREEN	256"	TAIL & CLR. LTS.
	14	WHITE	268"	GROUND
*	*	*	*	*


WEIGHT: .90 LBS.

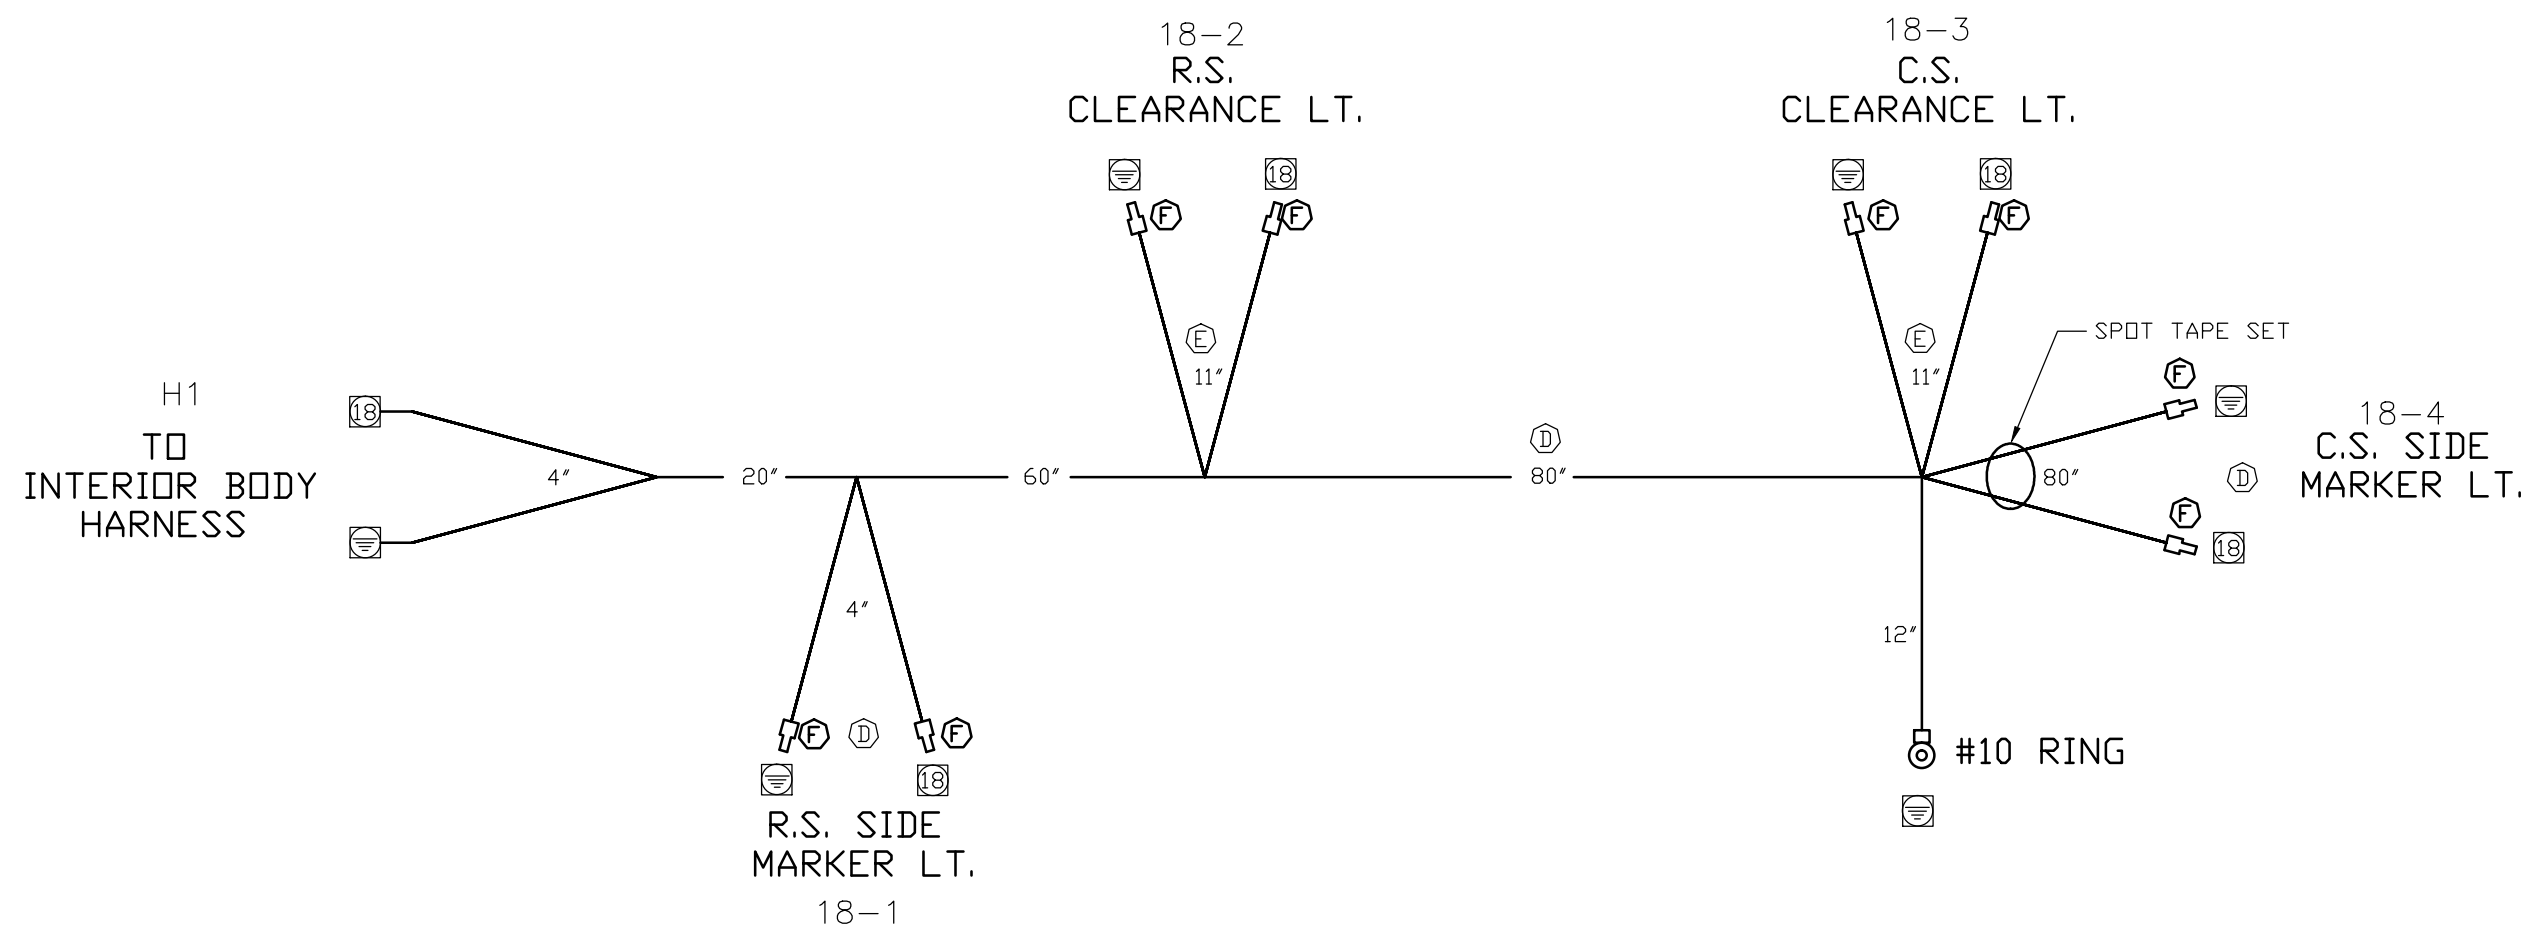

- = 20 Ga Wire
- = 14 Ga Wire
- = 18 Ga Wire
- = 12 Ga Wire
- = 16 Ga Wire
- = 10 Ga Wire
- = 8 Ga Wire

NOTE:
1) WIRE SHALL BE TEW 105°C UL & CSA
HARNESS SHALL CONFORM TO 951066 SPEC.
2) REFERENCE DRAWING 952794 FOR
LIGHT PLACEMENT PER CONFIGURATION.
3) HARNESS DEFINES LARGEST GAUGE END. USE
ONLY STEP-DOWN BUTT WITH TAPER DOWN
BARRELS 512436-02 (EX. DEL-CITY pn#421115)

Terminals	
	Bullet .180 Male
	Bullet .180 Female
	Butt Connector
	Step-Down Butt Con. (SEE NOTE #3)
	Ring Miniature
	Spade .250 Female
	Spade .250 Male



LET	DATE	E.C.N.	REVISION RECORD	BY
	5-90	4265	Production Release	J.S.
A	11-90	4282A	90 Was 70, 20 Was 12	J.S.
			Added Butt Connectors	
B	4/93	4409H	Rev. For 1994 A/S Trl.	R.A.
C	6/93	4409S	Delete 3 Breakouts	R.A.
D	12/00	4826B	Rev. To Add C.S. & R.S. Side Marker Lights, 80" Was 76"	R.A.
E	10/02	4947	11" WAS 4" RS/CS CLEARANCE ONLY	BS
F	1/10	T-02573	INSTALL STEP DOWN BUTT CONN.	MI


4	500419	TERMINAL, #10 RING, 14-16 GA.	1	EA
3	510537-08	WIRE,14 GA.,19 STRAND,GREEN	21.34	FT
2	510537-06	WIRE,14 GA.,19 STRAND,WHITE	22.34	FT
1	512436-02	CONNECTOR,BUTT SPLICE STA-KON #16	8	EA
ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ±		Airstream	DRAWN BY RLA	
NEXT ASS'Y			APPROVED BY	
		FIRST USAGE: TRAILER		
TITLE Harness, Frnt. Clr. Lt.				
SCALE 1=1	DATE 10/02	DRAWING NUMBER 510907-03	C	REV. F

512469-01

Weight: XX Lbs.
First Usage - Eddie Bauer

Terminals


- Bullet .180 Male
- Bullet .180 Female
- Butt Connector
- Ring .250 I.D.
- Spade .250 Female Fully-Insulated
- Spade .250 Female Rt. Angle-Insulated
- Spade .250 Male
- Coax Comp. Conn.



OBSOLETE

EGA No.: E-00424
Name: RUSS A.
Date: 5/9/2012
Replaced By: 512469-02
Disposition: OBS. - Running Change For 2013 M.

LET	DATE	E.C.N.	REVISION RECORD	BY
*	9/10	E-00331	Production Release	RA
A	1/11	E-00345	Add Cir's 3, 3Aa, 3Ab, 3Ac, Delete	RA
			Circuits 46 & 47	RA

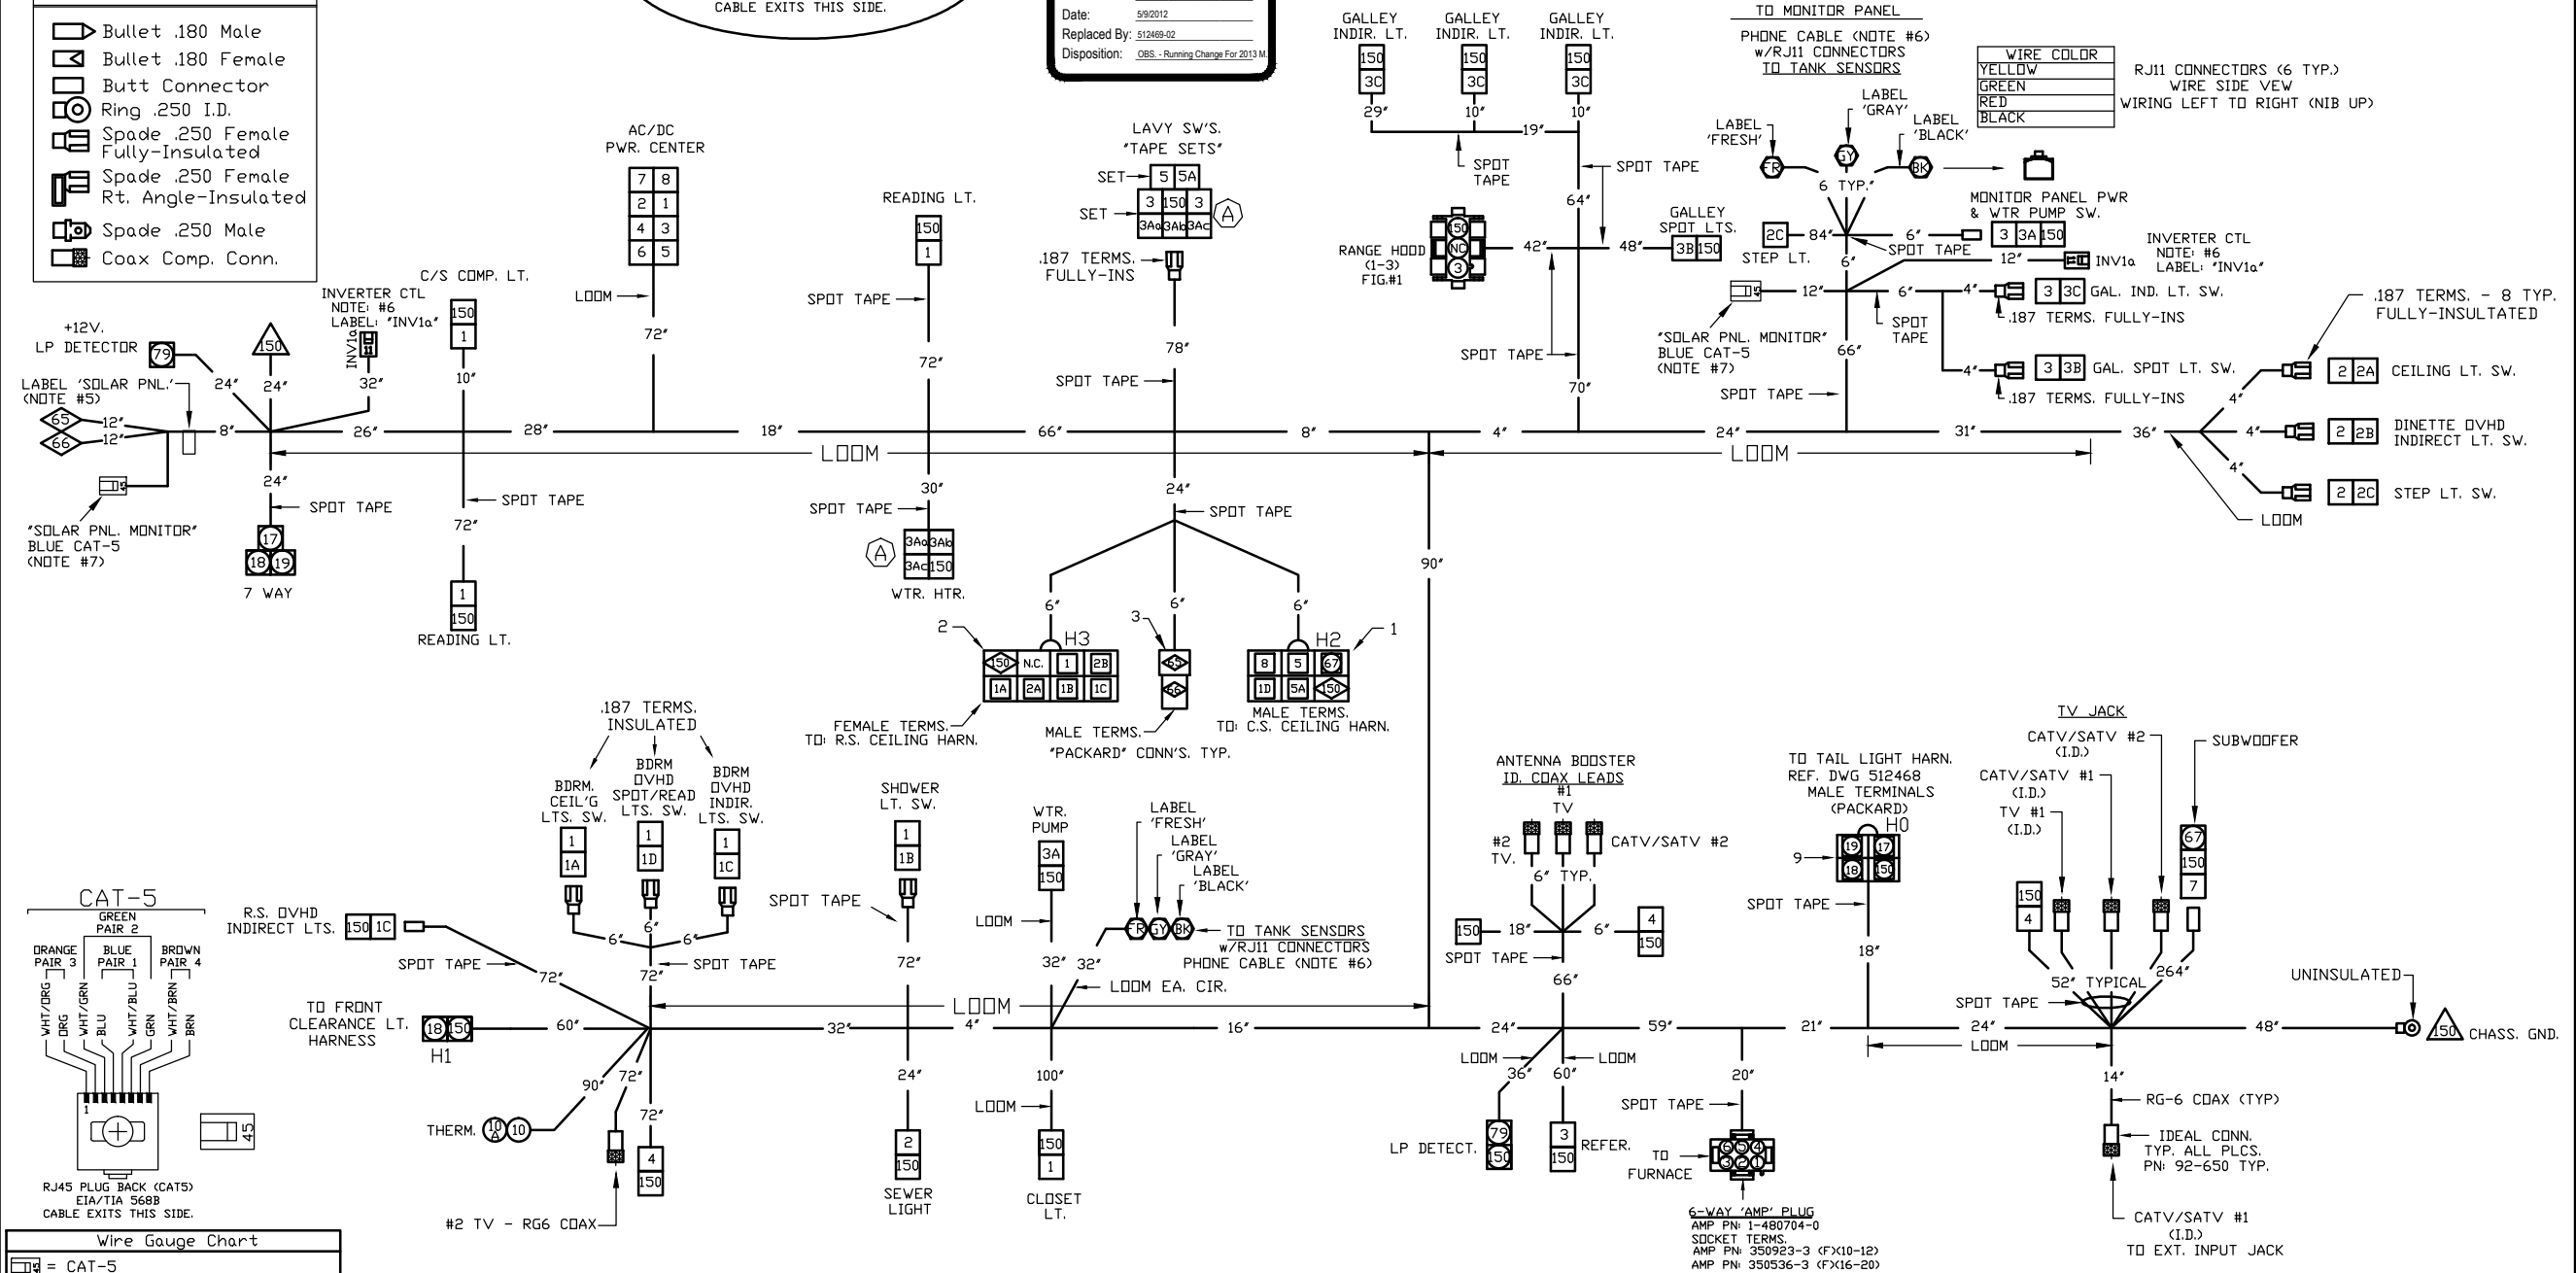

Wire Gauge Chart	
	= CAT-5
	= 26 Ga Wire
	= 20 Ga Wire
	= 18 Ga Wire
	= 16 Ga Wire
	= 14 Ga Wire
	= 12 Ga Wire
	= 10 Ga Wire
	= 8 Ga Wire

NOTE:

- ALL CONNECTORS ARE WIRE SIDE VIEW.
- ALL WIRE TO BE TEW, 105C, UL/CSA LISTED.
- *
- ALL TERMS. ARE INSULATED UNLESS NOTED.
- CIR'S. 65, 66 TO BE LABELED SOLAR PNL.
- TELEPHONE CABLE TO BE FLAT, 26 GA., STRANDED, (4) CONDUCTOR WITH JACKET FOR TELE. JACK, CONSISTING OF RED, GREEN, YELLOW AND BLACK WIRES.
- HARNESS MANUFACTURE CAN PURCHASE A BLUE 25FT PRE-ASSEMBLY CAT-5 IF PREFERRED.

No.	Ga	Color	Function
1	12	Purple	12V. Feed
1A	12	Purple/wht.	Bdrm. Ceiling Lt.
1B	12	Purple/blk.	Shower Lt.
1C	12	Purple/yel.	Bdrm. Ovhd. Ind. Lts.
1D	12	PURPLE/red	Bdrm. Ovhd. Spot Lts.
2	12	Yellow	12V. Feed
2A	12	Yellow/blk.	Main Ceiling Lt.
2B	12	Yellow/red	Dinette Ovhd. Ind. Lts.
2C	12	Yellow/grn.	Step Lt.
3	12	Pink	12V. Feed
3A	12	Orange/wht	Water Pump
3Aa	12	Orange/blk.	Wtr. Heater Gas Sw.
3Ab	12	Blue/blk.	Wtr. Htr. Lock-out Lt.
3Ac	12	White/blk.	Wtr. Heater Elec. Sw.
3B	12	PINK/blk	Galley Spot Lts.
3C	12	Pink/grn.	Galley Indirect Lts.
4	12	Brown	12V. Feed
5	12	Blue	12V. Feed

No.	Ga	Color	Function
5A	12	Blue/blk.	Bath Lights
6	12	Red	12V. Feed
7	12	Black	12V. Feed
8	12	Gray	12V. Feed
10	18	Blue	Furnace T-Stat (+)
10A	18	Blue/wht.	Furnace T-Stat (-)
17	14	Red	Lt. Turn & Stop
18	14	Green	Clr. & Tail Lts.
19	14	Brown	Rt. Turn & Stop
65	10	Yellow	+ From Solar Pnl.
66	10	Green	- From Solar Pnl.
67	14	Blue/wht.	Subwoofer Remote Sw.
79	14	Black/wht.	LP Detector
150	*	White	Chassis Ground
BK	26	Black	Blk. Tank Probe-Note 6
FR	26	White	Fresh Tank Probe-Note 6
GY	26	Gray	Gray Tank Probe-Note 6
*	*	*	*

9	510836-01	CONNECTOR 4-WAY, MALE, #629454	1 EA
8	510833-03	TERMINAL MALE 10-12 #2977994	5 EA
7	510834-02	TERMINAL FEMALE 14-16 #2965511	3 EA
6	510834-03	TERMINAL FEMALE 12 #2965143	6 EA
5	510833-02	TERMINAL MALE 14-16 #2971962	8 EA
4	510834-04	TERMINAL FEMALE 10 #6288913	1 EA
3	510835-01	CONNECTOR 2-WAY MALE, #2984883	1 EA
2	510838-02	CONNECTOR 8-WAY, FEMALE, #2965977	1 EA
1	510837-01	CONNECTOR 6-WAY, MALE, #2977042	1 EA

ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ± .25"	Airstream		DRAWN BY RUSS A	
NEXT ASS'Y *			APPROVED BY	
		PRODUCT LINE 25' FB Int. - E.B. Trl.		
TITLE Harness, Body, Interior				
SCALE N/A	DATE 8/30/10	DRAWING NUMBER 512469-01	C	REV. A

512473-01

Weight: 11 Lbs.

OBSOLETE

ECA No.:

E-00424

Name:

RUSS A

Date:

5/9/2012

Replaced By:

512473-02


Disposition:

OBS - Running Change For 2013 M

LET	DATE	E.C.N.	REVISION RECORD	BY
*	9/10	E-00331	Production Release	RA
A	2/11	E-00331	Relocated Cir's 65 & 66	RA

FRONT

REAR

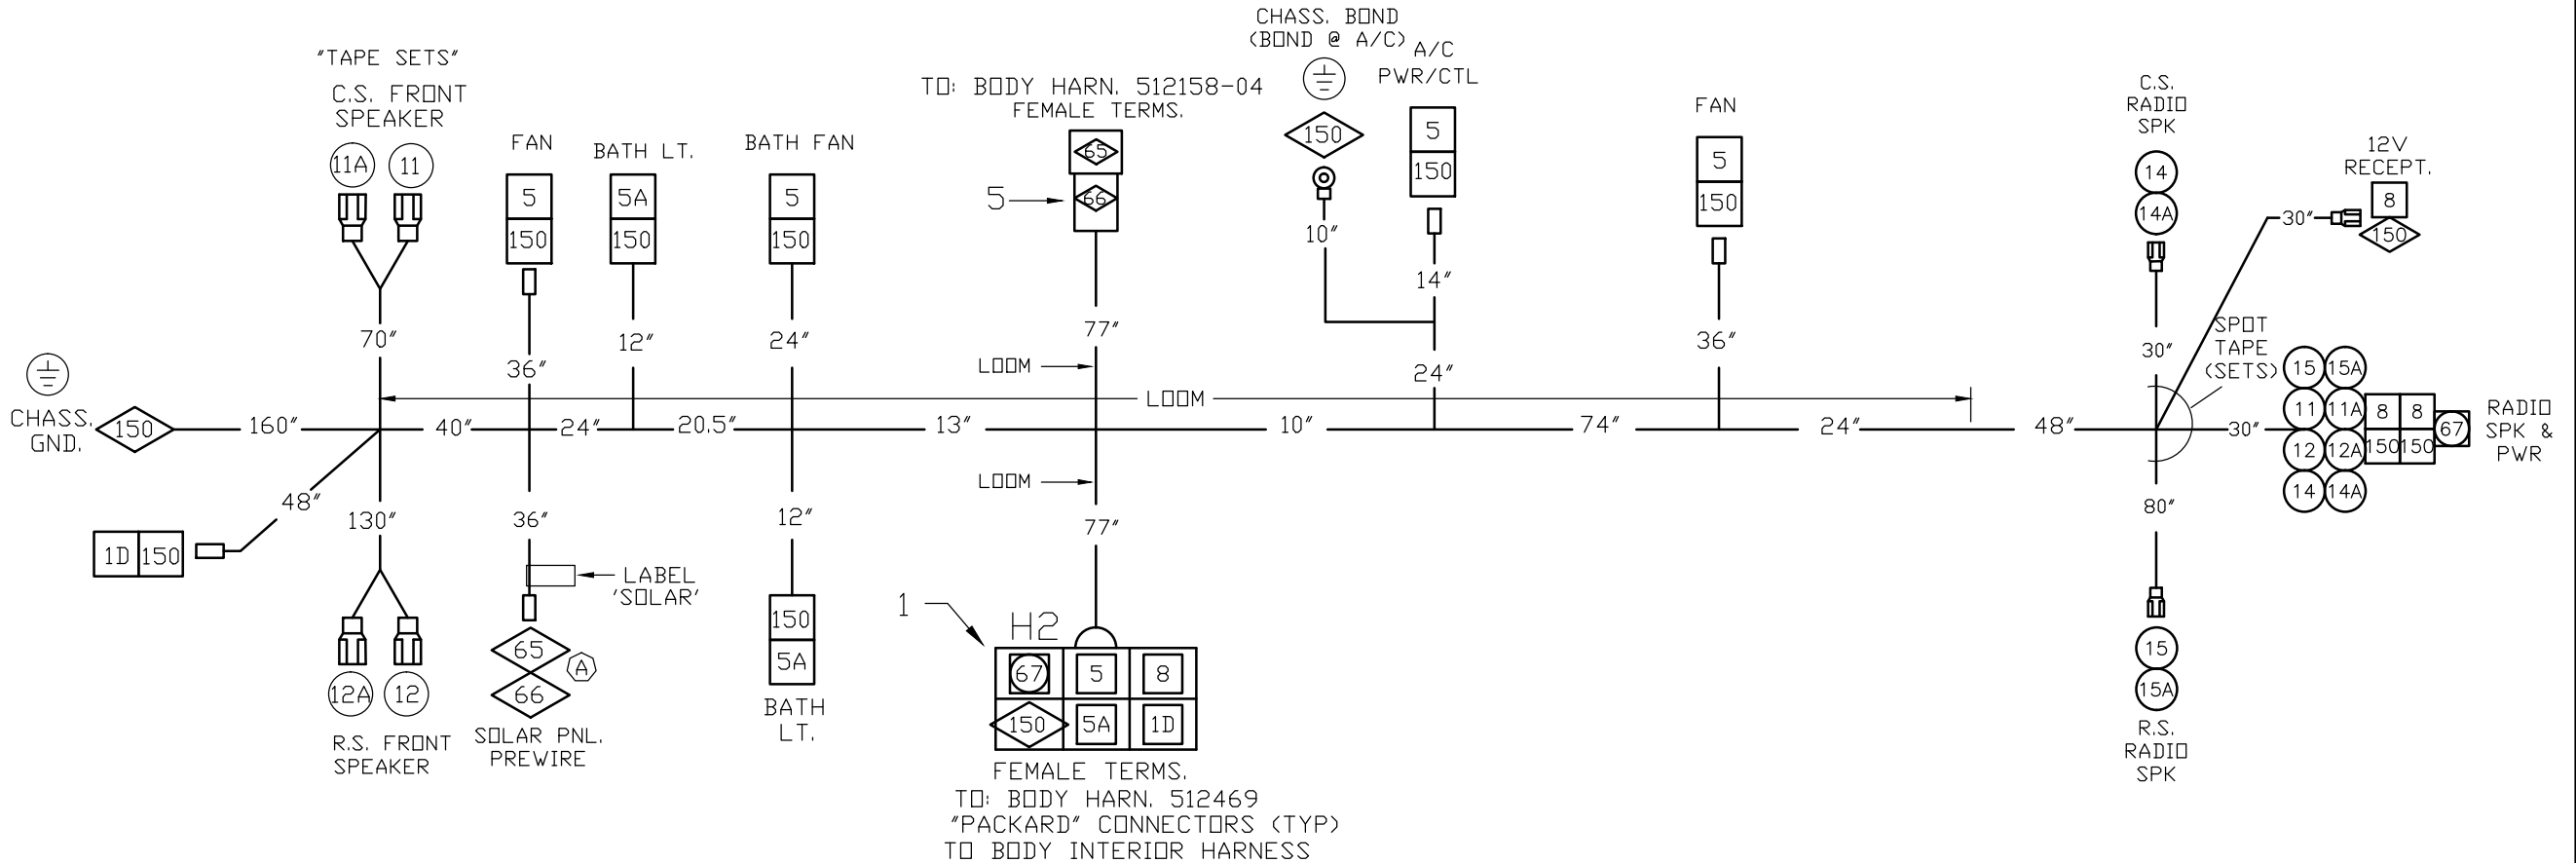

Wire Gauge Chart	
= CAT-5 (RJ45)	= PHONE (RJ11)
= 26 Ga Wire	= 14 Ga Wire
= 20 Ga Wire	= 12 Ga Wire
= 18 Ga Wire	= 10 Ga Wire
= 16 Ga Wire	= 8 Ga Wire

- NOTE:
- ALL CONNECTORS ARE WIRE SIDE VIEW.
 - ALL WIRES TO BE TEW, 105C, UL/CSA. LISTED
 - ALL TERMINALS ARE INSULATED UNLESS NOTED.

No.	Ga	Color	Function
5	12	Blue	+12V.
5A	12	Blue/blk.	Bath Lights
8	12	Gray	+12V.
11	18	Gray	CS Spkr.(FRT +)
11A	18	Black	CS Spkr.(FRT -)
12	18	Orange	RS Spkr.(FRT +)
12A	18	Black	RS Spkr.(FRT -)
14	18	Blue	CS Spkr.(REAR +)
14A	18	Black	CS Spkr.(REAR -)
15	18	Red	RS Spkr.(REAR +)
15A	18	Black	RS Spkr.(REAR -)
65	10	Yellow	Solar Panel (+)
66	10	Green	Solar Panel (-)
67	14	Blue/wht.	Sub woofer Remote Sw.
150	*	White	Ground

Terminals	
	Spade .110 Female
	Bullet .180 Male
	Bullet .180 Female
	Bullet .156 Female
	Bullet .156 Male
	Butt Connector
	Ring .25" I.D.
	Spade .250 Female
	Spade .250 Male
	Coax Connector

5	510835-02	CONNECTOR 2-WAY, FEMALE, #2973	1	EA
4	510835-04	TERMINAL FEMALE 10 # 6288913	3	EA
3	510834-03	TERMINAL FEMALE 12 #2965143	4	EA
2	510834-02	TERMINAL FEMALE 14-16 #2965511	1	EA
1	510837-02	CONNECTOR 6-WAY, FEMALE, #2977	1	EA
ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ± .25"		Airstream	DRAWN BY RUSS A	
NEXT ASS'Y *			APPROVED BY	
PRODUCT LINE 25' FB Int. E. Bauer TT				
TITLE Harness, Ceiling, C.S.				
SCALE N/A	DATE 9/27/10	DRAWING NUMBER 512473-01		REV. A

512160-04

Weight: 11 Lbs.

OBSOLETE

ECA No.: E-00424


Name: RUSS A.

Date: 4/25/2012

Replaced By: 512160-05

Disposition: OBS. FOR 2013 M.Y.

LET	DATE	E.C.N.	REVISION RECORD	BY
-	3/06	E00043	Production Release	MI
A	5/06	E-00043	FIRST PRDD. RUN UPDATES	MI
B	12/06	E-00127	HARN. UPDATES	MI
C	6/10	E-00323	RG6 Was RG-59U, Rev. Coax Conn.	RA
D	2/11	E-00331	20" Was 12", Add Eddie Bauer Usage	RA

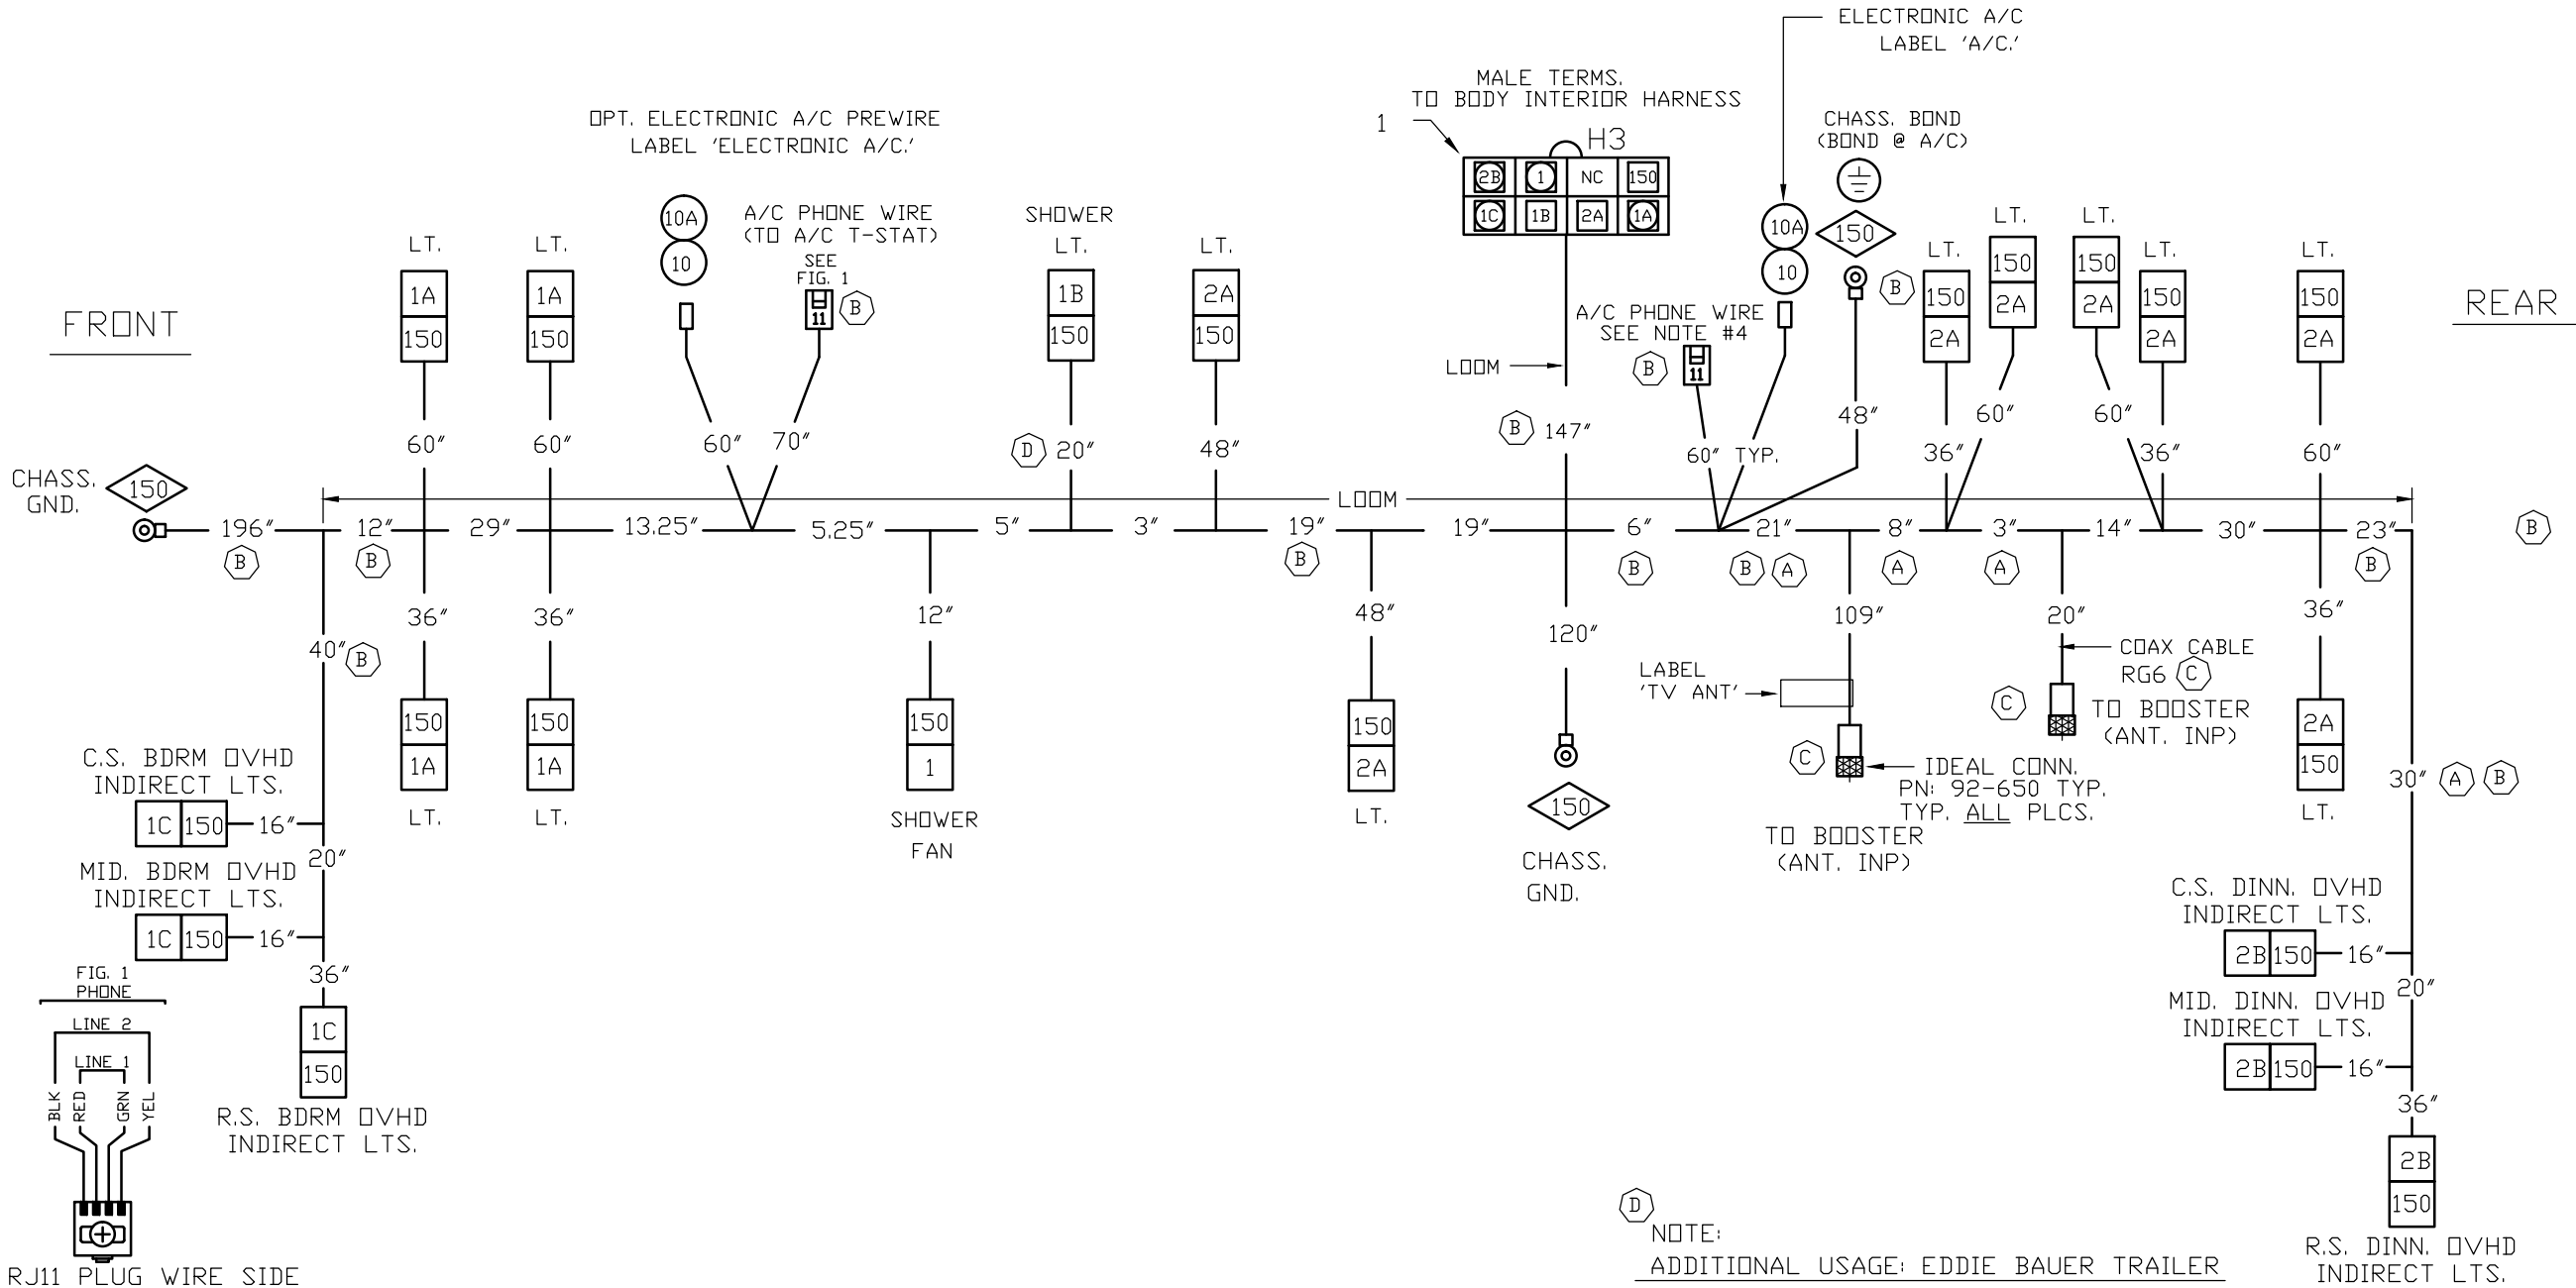

NOTE:
ADDITIONAL USAGE: EDDIE BAUER TRAILER

RJ11 PLUG WIRE SIDE

Wire Gauge Chart			
	= CAT-5 (RJ45)		= PHONE (RJ11)
	= 26 Ga Wire		= 14 Ga Wire
	= 20 Ga Wire		= 12 Ga Wire
	= 18 Ga Wire		= 10 Ga Wire
	= 16 Ga Wire		= 8 Ga Wire

HARNESS CONNECTION CHART		
SYM.	DRAWING#	(*1)
H3	512158	

*1) THE HARNESS #'S REFLECT THE HARNESS #'S IN USE DURING DEVELOPMENT. REVIEW #'S FOR UPDATES.


Terminals	
	Spade .110 Female
	Bullet .180 Male
	Bullet .180 Female
	Bullet .156 Female
	Bullet .156 Male
	Butt Connector
	Ring .25" I.D.
	Spade .250 Female
	Spade .250 Male
	Coax Comp. Conn.

No.	Ga	Color	Function
1	12	Purple	+12V.
1A	12	Purple/wht.	Bdrm. Ceiling Lt.
1B	12	Purple/blk.	Shower Lt.
1C	12	Purple/yel.	BDRM OVHD INDIR. LTS.
2	12	Yellow	+12V.
2A	12	Yellow/blk.	Mian Ceiling Lt.
2B	12	Yellow/red	DINN. OVHD INDIR. LTS.
10	18	Blue	Furnace T-Stat
10A	18	Blue/wht.	Furnace T-Stat
150	12	White	Ground


3	510833-02	TERMINAL MALE 14-16 #2971962	4	EA
2	510833-03	TERMINAL MALE 10-12 #2977994	4	EA
1	510838-01	CONNECTOR 8-WAY, MALE, #2965972	1	EA
ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ± .25"		Airstream	DRAWN BY M.I.	
NEXT ASS'Y -			APPROVED BY	
PRODUCT LINE 25' FB INTERNATIONAL				
TITLE Harness, Ceiling, R.S.				
SCALE N/A	DATE 3/8/06	DRAWING NUMBER 512160-04		C REV. D

NOTE:

- ALL CONNECTORS ARE WIRE SIDE VIEW.
- ALL WIRES TO BE TEW, 105C, UL/CSA, LISTED
- ALL TERMINALS ARE INSULATED UNLESS NOTED.
- TELEPHONE CABLE TO BE FLAT, 26 GA., SOLID, (4) CONDUCTOR WITH JACKET, FOR PHONE JACKS, CONSISTING OF RED, GREEN, YELLOW AND BLACK WIRES.

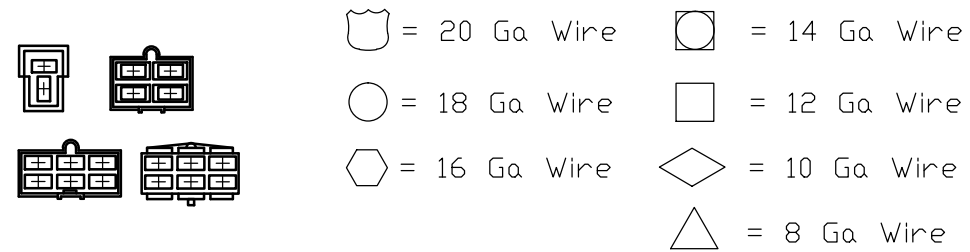

WEIGHT: ** LBS.

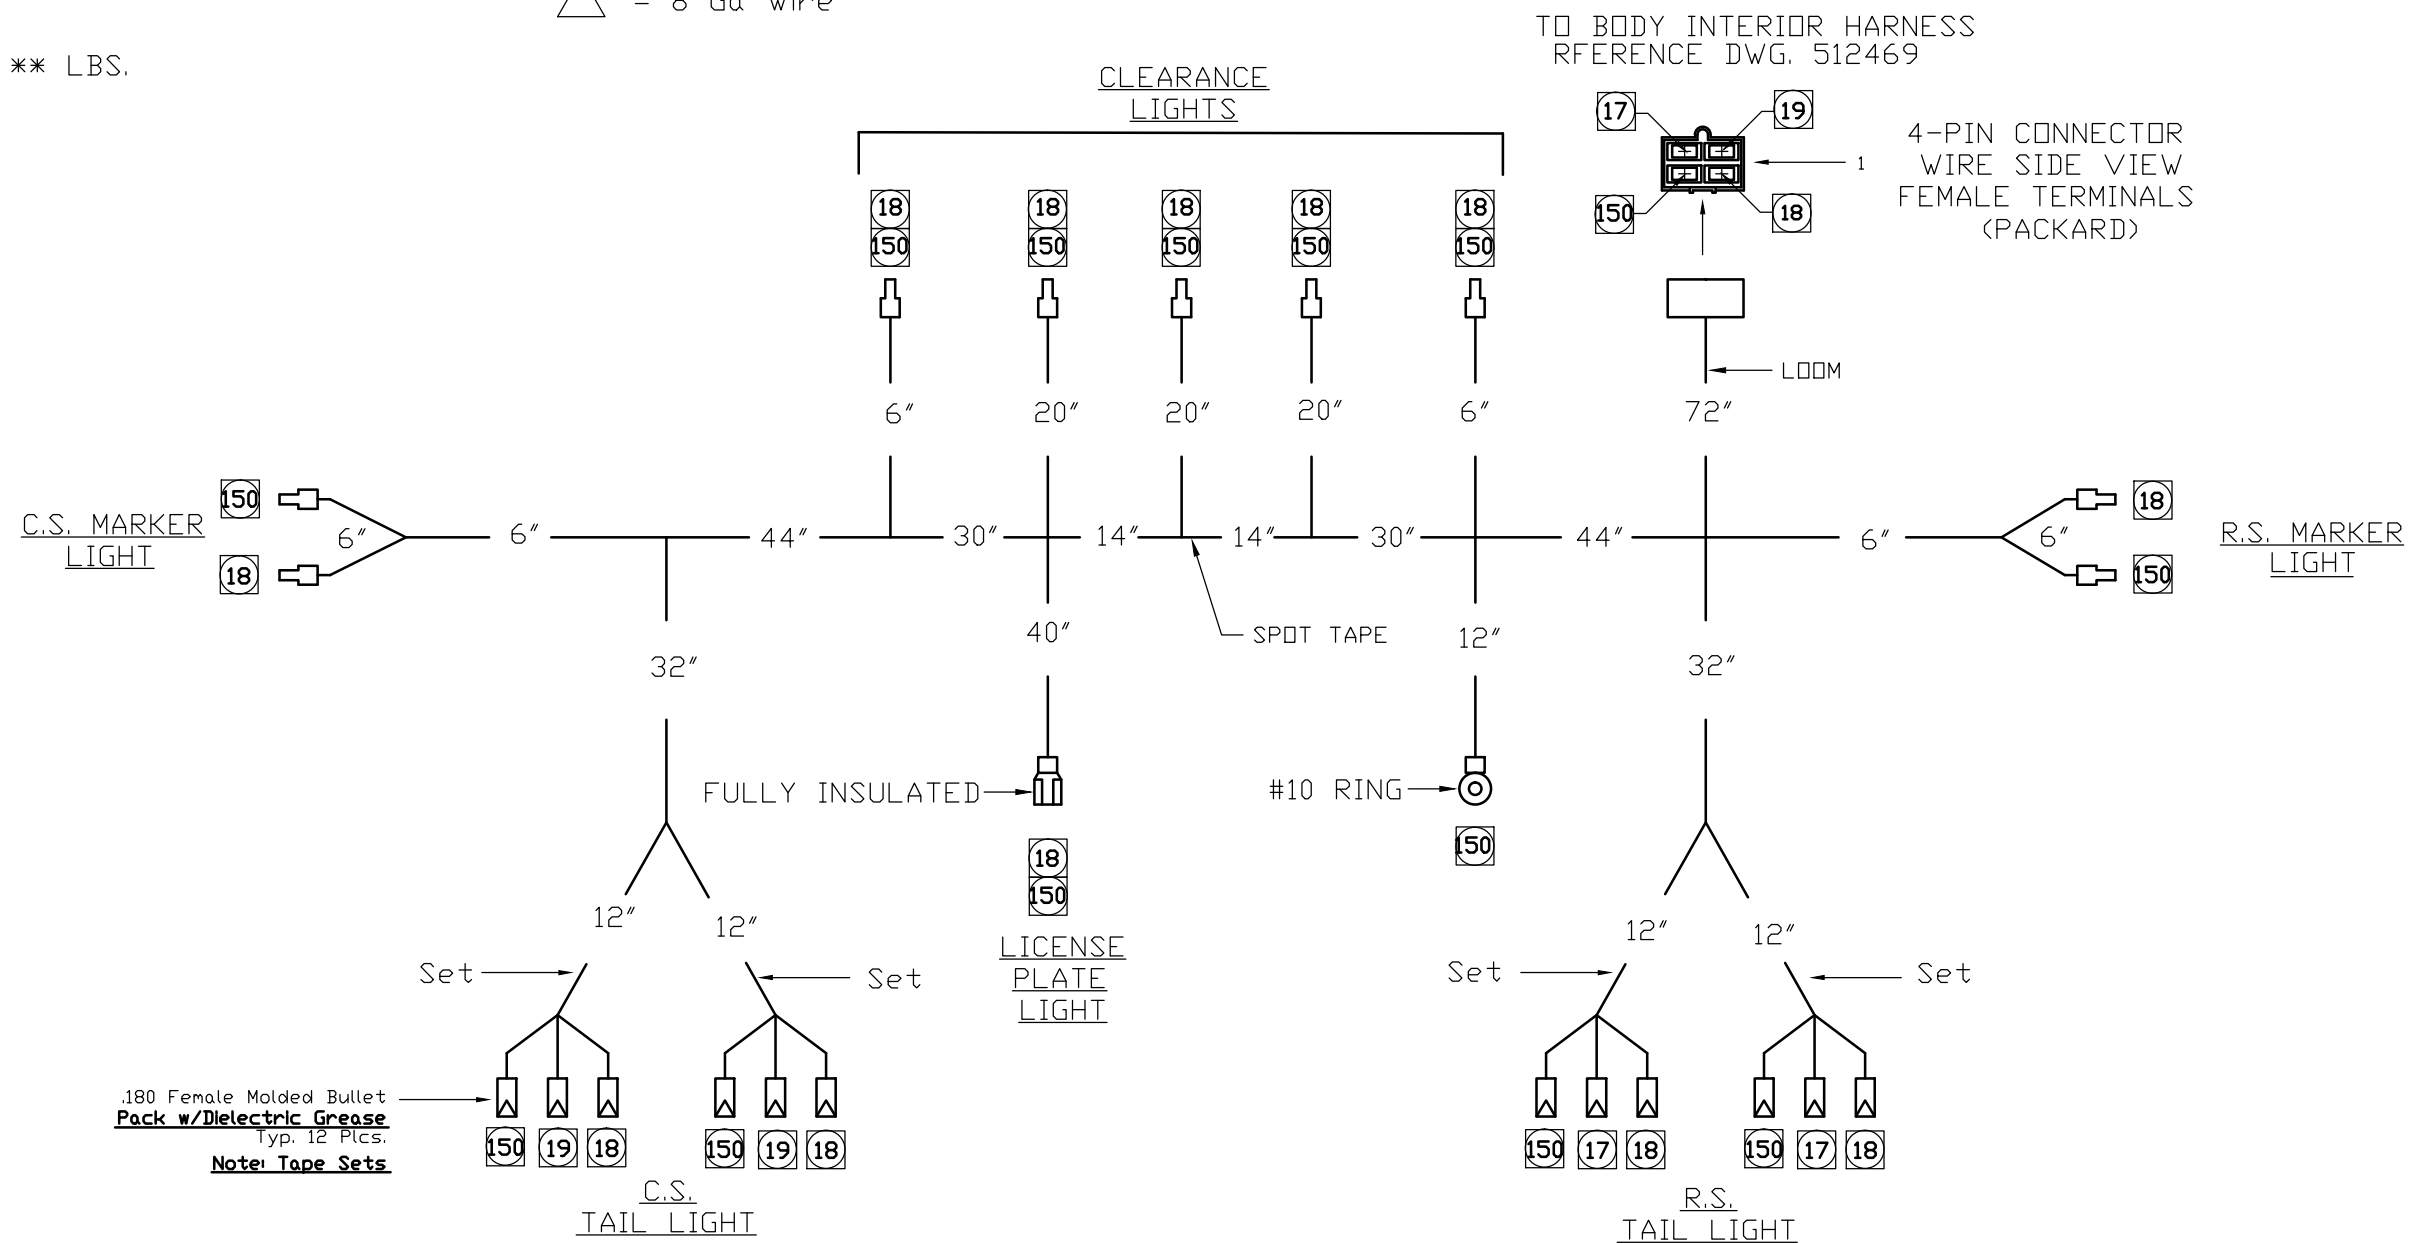

NOTE:

1) WIRE SHALL BE TEW, 105C, UL & CSA LISTED.

2) HARNESS DEFINES LARGEST GAUGE END. USE ONLY STEP-DOWN BUTT WITH TAPER DOWN BARRELS (EX. DEL-CITY pn#421115)


RECOMMENDED VENDOR:
QUALITRONICS
TELEPHONE: (765) 966-2039

No.	Ga	Color	Cutting Length	USA Function
17	14	RED	*	LFT. TURN & STOP
18	14	GREEN	*	TAIL, CLRNCE LTS
19	14	BROWN	*	RT. TURN & STOP
150	14	WHITE	*	GROUND

Terminals	
	Bullet .180 Male
	Bullet .180 Female
	Butt Connector
	Step-Down Butt Con. (SEE NOTE #2)
	Ring Miniature
	Spade .250 Female
	Spade .250 Male

2	510834-02	TERMINAL FEMALE 14-16 #2965511	4	EA
1	510836-02	CONNECTOR 4-WAY, FEMALE, #2977	1	EA
ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ± *	Airstream		DRAWN BY RUSS A.	
NEXT ASS'Y *			APPROVED BY	
		FIRST USAGE: 25' FB Int. - E.B. Trl.		
TITLE <i>Harness, Tail & Clr. Light</i>				
SCALE N/A	DATE 09/21/10	DRAWING NUMBER 512468		REV. C *

LET	DATE	P.C.R.	REVISION RECORD	BY
*	9/10	E-00331	Production Release	RA
A	12/10	E-00331	Revised Wire Pull Locations	RA
B	1/11	E-00345	Add Cir. 5 & GFCI Recept.	RA
C	4/11	E-00367	Add Blu-Ray Player Recepts.	RA
D	10/13	T-03410	77" WAS 76"	RA

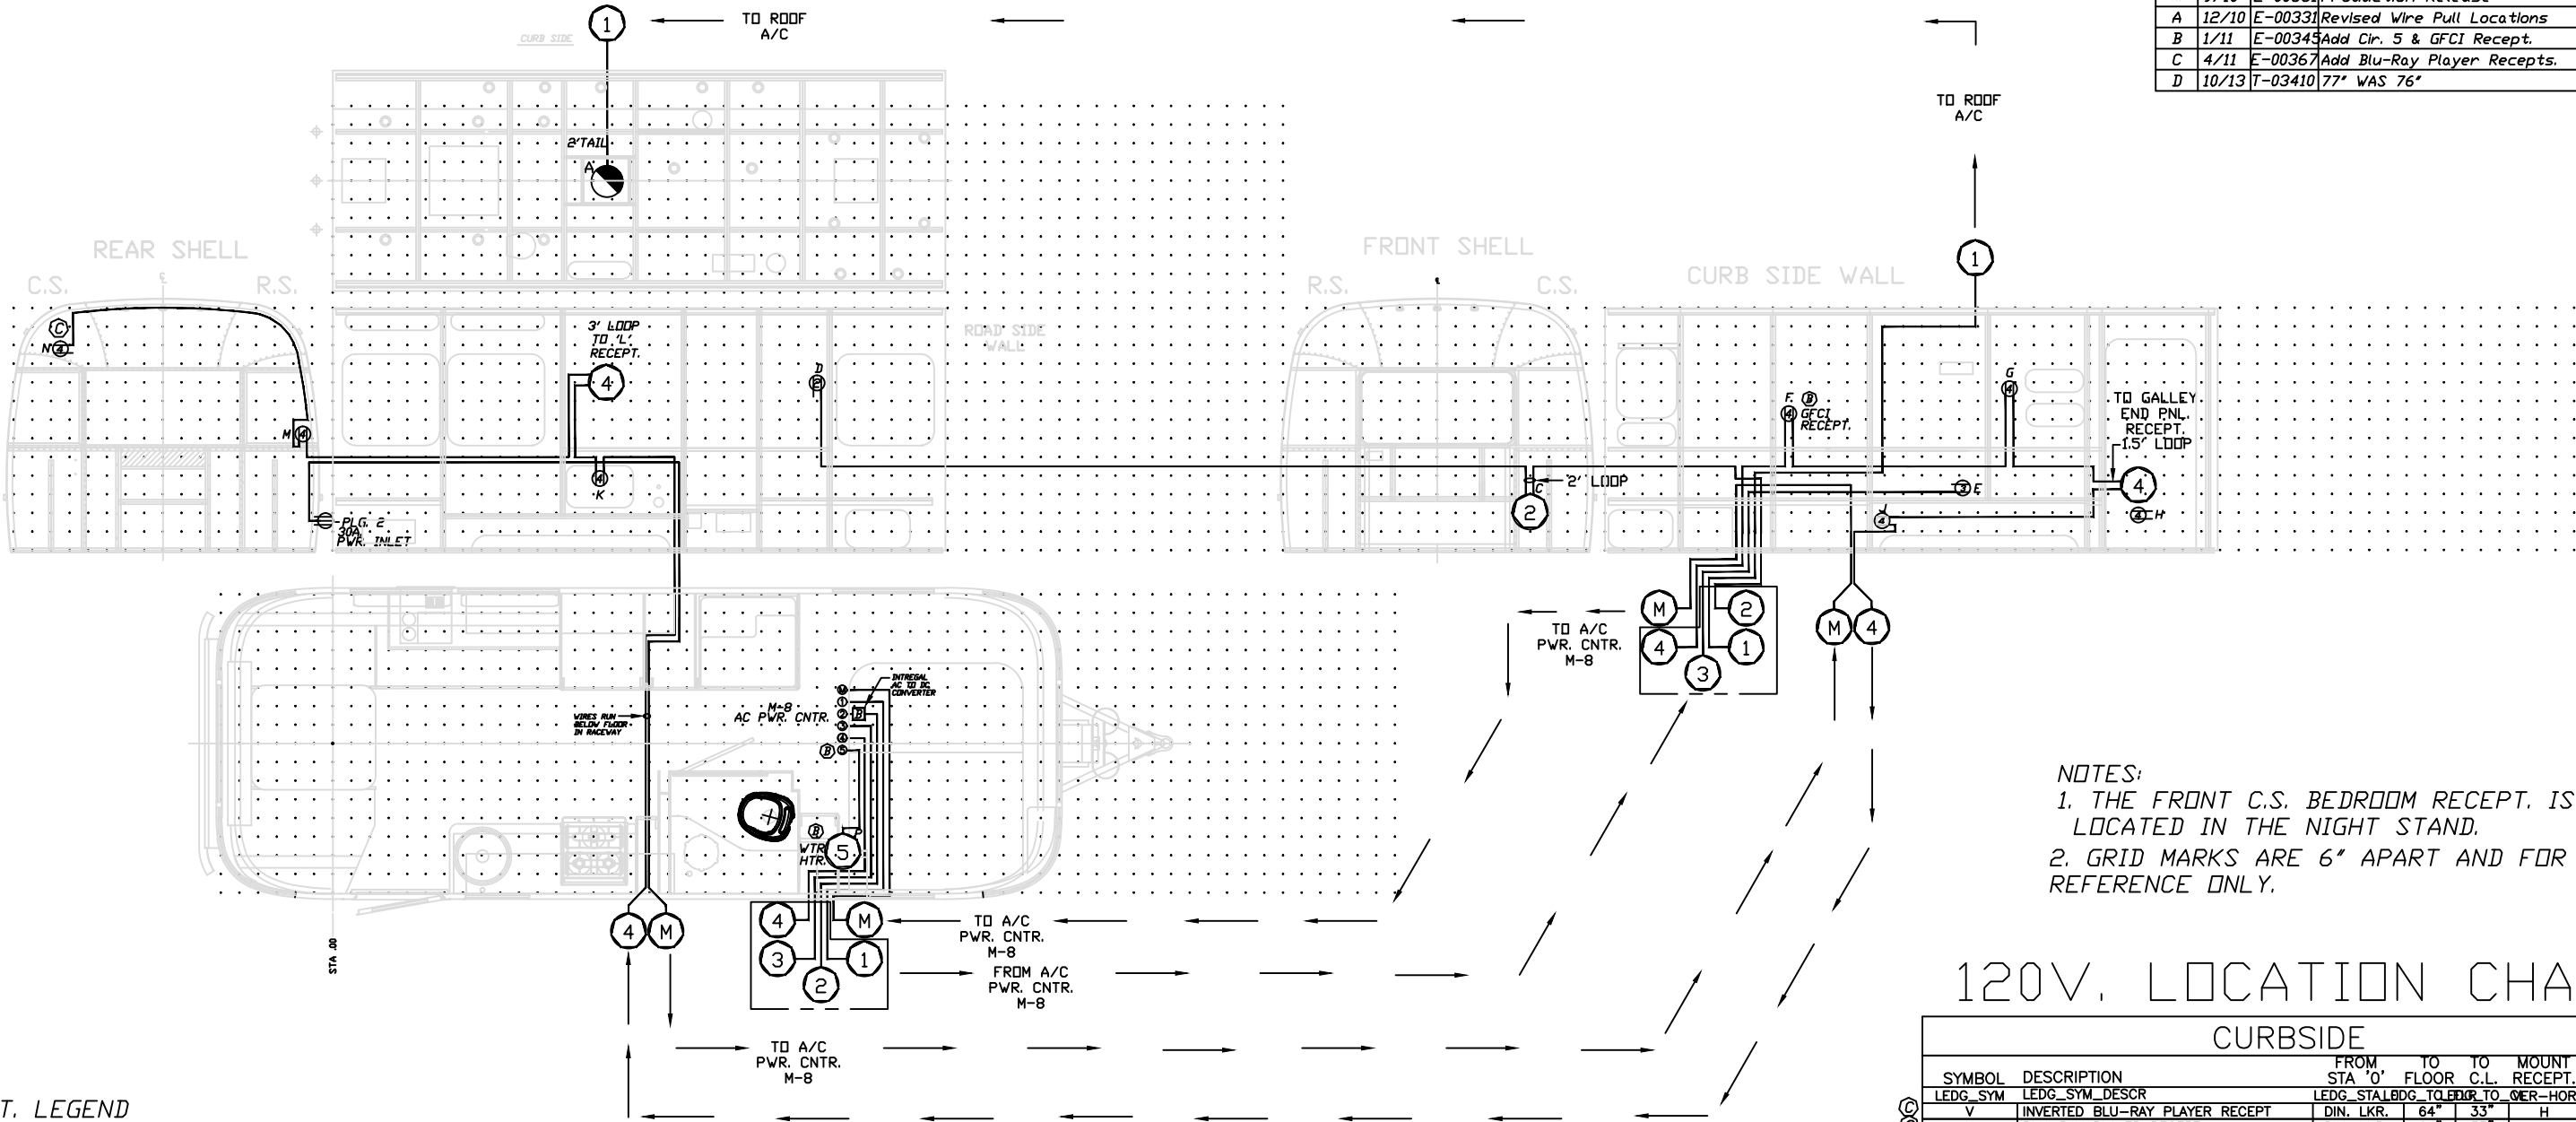

NOTES:
1. THE FRONT C.S. BEDROOM RECEPT. IS LOCATED IN THE NIGHT STAND.
2. GRID MARKS ARE 6" APART AND FOR REFERENCE ONLY.

RECEPT. LEGEND

- A. AIR CONDITIONER
B. INTEGRAL CONVERTER (WIRED DIRECT)
C. FRONT C.S. BEDROOM RECEPT.
D. ROADSIDE BEDROOM RECEPT.
E. MICROWAVE RECEPT. (SINGLE 20A.)
F. BATH (GFCI) RECEPT.
G. GALLEY RECEPT.
H. GALLEY END PANEL RECEPT.
J. OUTSIDE RECEPT.
K. REFER RECEPT. (SINGLE)
L. LOUNGE AREA RECEPT.
M. DINETTE RECEPT.
N. BLU-RAY PLAYER RECEPT.
P. WATER HEATER (WIRED DIRECT)
R. 1000 WATT INVERTER. w/7A. CIRCUIT BREAKER
S. INVERTED BEDROOM TV RECEPT. (SINGLE)
T. INVERTED LOUNGE AREA TV RECEPT. (SINGLE)
U. INVERTED DINETTE RECEPT.
V. INVERTED BLU-RAY PLAYER RECEPT.
W. GEN. PREP 30A. MALE POWER INLET
X. 30A. TRANSFER SWITCH

USA CHART

SEE SHEET #2 FOR OPTION WIRING. (OPTIONS MAY CHANGE THIS SHEET.)

CIR. #	WIRE TYPE	PN#	CUT LENGTH
MAIN	WIRE, #10-2 ROMEX W/GROUND (ORG)	510152	TBD
1	WIRE ROMEX 12-2 WITH GROUND (YEL)	500040	TBD
2	WIRE ROMEX 12-2 WITH GROUND (YEL)	500040	TBD
3	WIRE ROMEX 12-2 WITH GROUND (YEL)	500040	TBD
4	WIRE ROMEX 12-2 WITH GROUND (YEL)	500040	TBD
5	WIRE ROMEX 12-2 WITH GROUND (YEL)	500040	TBD

CANADA (CSA) CHART

SEE SHEET #2 FOR OPTION WIRING. (OPTIONS MAY CHANGE THIS SHEET.)

CIR. #	WIRE	ROMEX	#10-2 W/GROUND	CSA (ORG)	510002	TBD
1	WIRE	ROMEX	#12-2 W/GROUND	CSA (YEL)	510003	TBD
2	WIRE	ROMEX	#14-2 W/GROUND	CSA (WHT)	510004	TBD
3	WIRE	ROMEX	#14-2 W/GROUND	CSA (WHT)	510004	TBD
4	WIRE	ROMEX	#14-2 W/GROUND	CSA (WHT)	510004	TBD
5	WIRE	ROMEX	#14-2 W/GROUND	CSA (WHT)	510004	TBD

120V. LOCATION CHART

CURBSIDE							
SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR	TO C.L.	MOUNT	INSTALL	ON OPT.
LEDG. SYM	LEDG. SYM. DESCR	LEDG. STA	LEDG. BLDG. TO	LEDG. HOR	LEDG. OPT	LEDG. OPT	
V	INVERTED BLU-RAY PLAYER RECEPT	DIN. LKR.	64"	33"	H	INVERTER	
N	BLU-RAY PLAYER RECEPT	DIN. LKR.	64"	33"	H	*	
H	GALLEY END PANEL RECEPT. (1.5' LOOP)	40"	21"	*	V	*	
G	GALLEY RECEPT.	67"	53"	*	H	*	
E	MICROWAVE RECEPT. (SINGLE 20A)	82"	20"	*	H	*	
J	OUTSIDE RECEPT.	108"	12.5"	*	H	*	
*	WALL WIRE ENTRY	117"	FLOOR	*	*	*	
F	BATH (GFCI) RECEPT.	138"	44"	*	V	*	
M-8	POWER CENTER (8FT TAIL)	152"	FLOOR	*	*	*	
P	WTR. HEATER (WIRED DIRECT)	164.25"	FLOOR	*	*	*	
R	INVERTER, (7 FT TAIL), REF DWG 111270	219"	3"	*	*	INVERTER	
C	BDRM. RECEPT. - 2' LOOP	FRONT WRAP	24"	30"	V	*	


ROADSIDE							
SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR	TO C.L.	MOUNT	INSTALL	ON OPT.
LEDG. SYM	LEDG. SYM. DESCR	LEDG. STA	LEDG. BLDG. TO	LEDG. HOR	LEDG. OPT	LEDG. OPT	
PLG2	MAIN SHORE 30AMP RECEPT. (EXTERNAL)	-12"	11"	*	*	*	
U	INVERTED RS REAR RECEPT	-8"	43"	*	V	INVERTER	
M	RS REAR RECEPT	-4.5"	43"	*	V	*	
L	LOUNGE AREA TV RECEPT. - 3' LOOP	77"	54"	*	V	*	
T	INVERTED LOUNGE AREA TV RECEPT. - 3' LOOP	77"	54"	*	V	INVERTER	
K	REFER RECEPT. - 2' LOOP, MNT. IN BAFFLE	86"	29"	*	H	*	
D	BDRM. TV RECEPT.	156"	53"	*	V	*	
S	INVERTED BDRM. TV RECEPT.	156"	46.5"	*	V	INVERTER	
W	GEN. PREP. 30A. MALE POWER INLET	FRONT PLATE	19"	19"	V	*	

C = CORNER DOUBLE
C.L. = CENTER LINE OF UNIT.
V = MOUNT VERTICAL
H = MOUNT HORIZONTAL

ALL RECEPT. 6" (MIN.) REPAIR LOOP

ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ± *	Airstream		DRAWN BY RUSS A	
NEXT ASS'Y *			APPROVED BY	
FIRST USAGE:		25' FB Int. E. Bauer TT		
TITLE 110V Loc/Route, USA/CSA				
SCALE N.T.S.	DATE 9/23/10	DRAWING NUMBER 953009S1		REV. D

LET	DATE	P.C.R.	REVISION RECORD	BY
*	9/10	E-00331	Production Release	RA
A	12/10	E-00331	Revised Wire Pull Locations	RA
B	1/11	E-00345	Add Cir. 5 & GFCI Recept.	RA
C	4/11	E-00367	Add Blu-Ray Player Recepts.	RA
D	10/13	T-03410	77' WAS 76'	RA

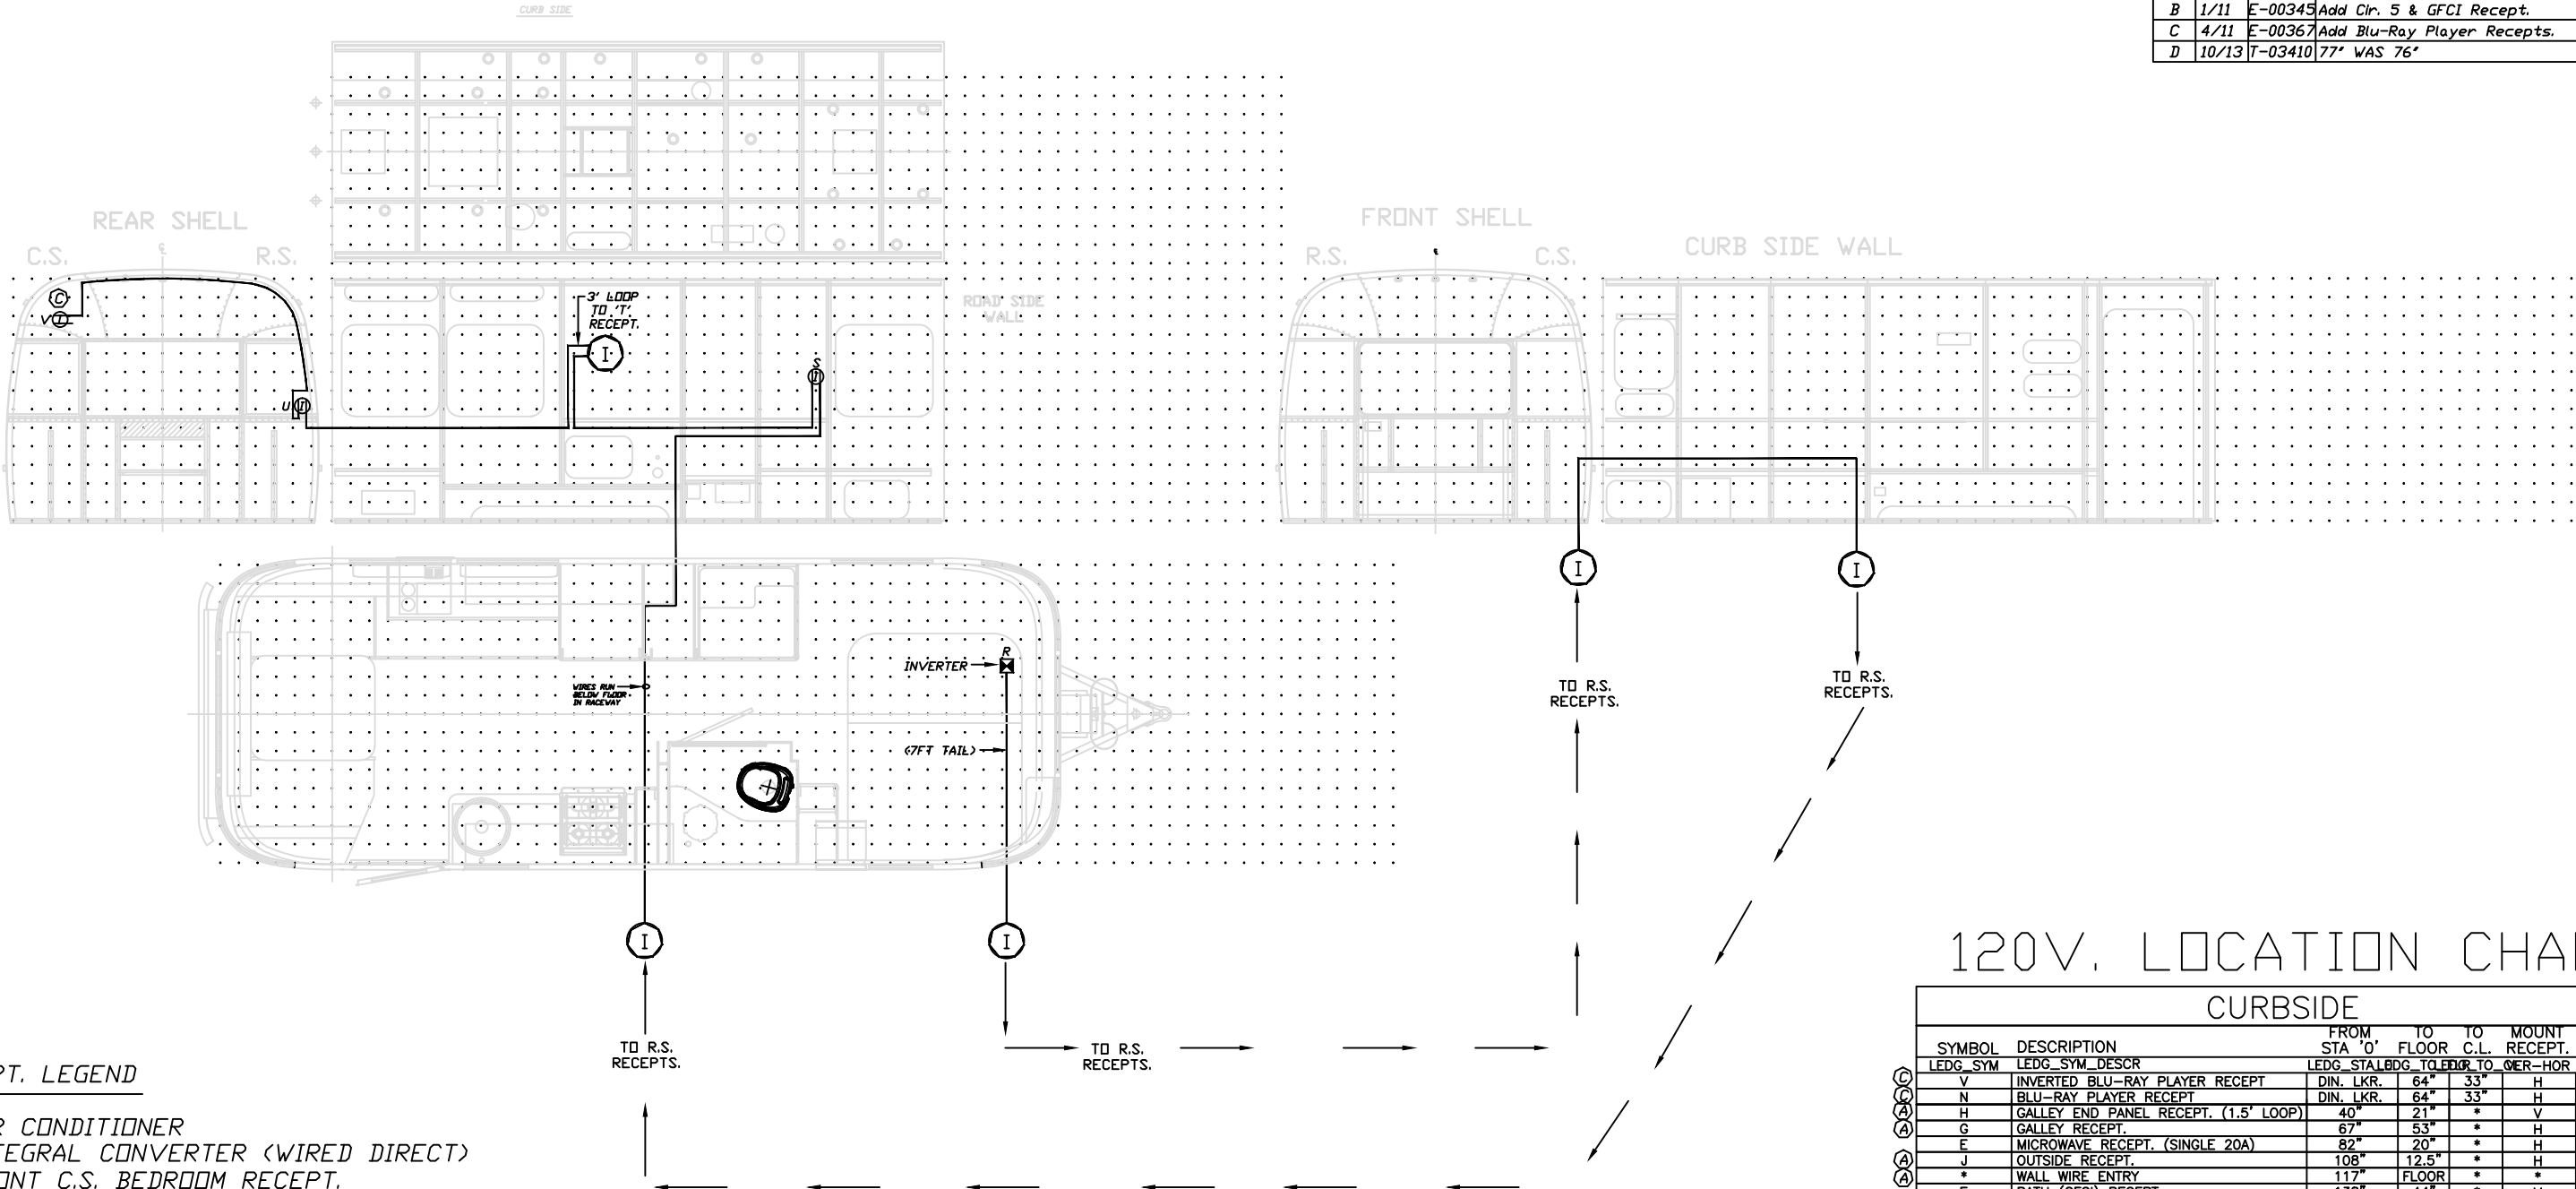

RECEPT. LEGEND

- A. AIR CONDITIONER
- B. INTEGRAL CONVERTER (WIRED DIRECT)
- C. FRONT C.S. BEDROOM RECEPT.
- D. ROADSIDE BEDROOM RECEPT.
- E. MICROWAVE RECEPT. (SINGLE 20A.)
- F. BATH (GFCI) RECEPT.
- G. GALLEY RECEPT.
- H. GALLEY END PANEL RECEPT.
- J. OUTSIDE RECEPT.
- K. REFER RECEPT. (SINGLE)
- L. LOUNGE AREA RECEPT.
- M. DINETTE RECEPT.
- N. BLU-RAY PLAYER RECEPT.
- P. WATER HEATER (WIRED DIRECT)
- R. 1000 WATT INVERTER. w/7A. CIRCUIT BREAKER
- S. INVERTED BEDROOM TV RECEPT. (SINGLE)
- T. INVERTED LOUNGE AREA TV RECEPT. (SINGLE)
- U. INVERTED DINETTE RECEPT.
- V. INVERTED BLU-RAY PLAYER RECEPT.
- W. GEN. PREP 30A. MALE POWER INLET
- X. 30A. TRANSFER SWITCH

USA CHART

CIR. #	WIRE TYPE	PN#	CUT LENGTH
INVERTER	WIRE ROMEX 12-2 WITH GROUND (YEL)	500040	TBD

CANADA (CSA) CHART

CIR. #	WIRE,ROMEX #12-2 W/GROUND	CSA (YEL)	510003	TBD
INVERTER	WIRE,ROMEX #12-2 W/GROUND	CSA (YEL)	510003	TBD


120V. LOCATION CHART

CURBSIDE									
	SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR	TO C.L.	MOUNT	INSTALL	ON OPT.	
	LEDG. SYM	LEDG. SYM_DESCR	LEDG. STA	LEDG. TO	LEDG. TO	LEDG. HOR	LEDG. OPT		
(C)	V	INVERTED BLU-RAY PLAYER RECEPT	DIN. LKR.	64"	33"	H	INVERTER		
(C)	N	BLU-RAY PLAYER RECEPT	DIN. LKR.	64"	33"	H	*		
(A)	H	GALLEY END PANEL RECEPT. (1.5' LOOP)	40"	21"	*	V	*		
(A)	G	GALLEY RECEPT.	67"	53"	*	H	*		
(A)	E	MICROWAVE RECEPT. (SINGLE 20A)	82"	20"	*	H	*		
(A)	J	OUTSIDE RECEPT.	108"	12.5"	*	H	*		
(A)	*	WALL WIRE ENTRY	117"	FLOOR	*	*	*		
(A)	F	BATH (GFCI) RECEPT.	138"	44"	*	V	*		
(B)	M-8	POWER CENTER (8FT TAIL)	152"	FLOOR	*	*	*		
	P	WTR. HEATER (WIRED DIRECT)	164.25"	FLOOR	*	*	*		
	R	INVERTER, (7 FT TAIL), REF DWG 111270	219"	3"	*	*	INVERTER		
	C	BDRM. RECEPT. - 2' LOOP	FRONT WRAP	24"	30"	V	*		
ROADSIDE									
	SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR	TO C.L.	MOUNT	INSTALL	ON OPT.	
	LEDG. SYM	LEDG. SYM_DESCR	LEDG. STA	LEDG. TO	LEDG. TO	LEDG. HOR	LEDG. OPT		
(A)	PLG2	MAIN SHORE 30AMP RECEPT. (EXTERNAL)	-12"	11"	*	*	*		
(A)	U	INVERTED RS REAR RECEPT	-8"	43"	*	V	INVERTER		
(D)	M	RS REAR RECEPT	-4.5"	43"	*	V	*		
(D)	L	LOUNGE AREA TV RECEPT. - 3' LOOP	77"	54"	*	V	*		
	T	INVERTED LOUNGE AREA TV RECEPT. - 3' LOOP	77"	54"	*	V	INVERTER		
(A)	K	REFER RECEPT- 2' LOOP, MNT. IN BAFFLE	86"	29"	*	H	*		
	D	BDRM. TV RECEPT.	156"	53"	*	V	*		
	S	INVERTED BDRM. TV RECEPT.	156"	46.5"	*	V	INVERTER		
	W	GEN. PREP. 30A. MALE POWER INLET	FRONT PLATE	19"	19"	V	*		


C = CORNER DOUBLE
C.L. = CENTER LINE OF UNIT.
V = MOUNT VERTICAL
H = MOUNT HORIZONTAL

ALL RECEPT. 6" (MIN.) REPAIR LOOP

ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ± *	Airstream		DRAWN BY RUSS A	
NEXT ASS'Y *			APPROVED BY	
		FIRST USAGE: 25' FB Int. E. Bauer TT		
TITLE 110V Loc/Route, USA/CSA, Inverter Dpt.				
SCALE N.T.S.	DATE 9/24/10	DRAWING NUMBER 953009S2	D	REV. D

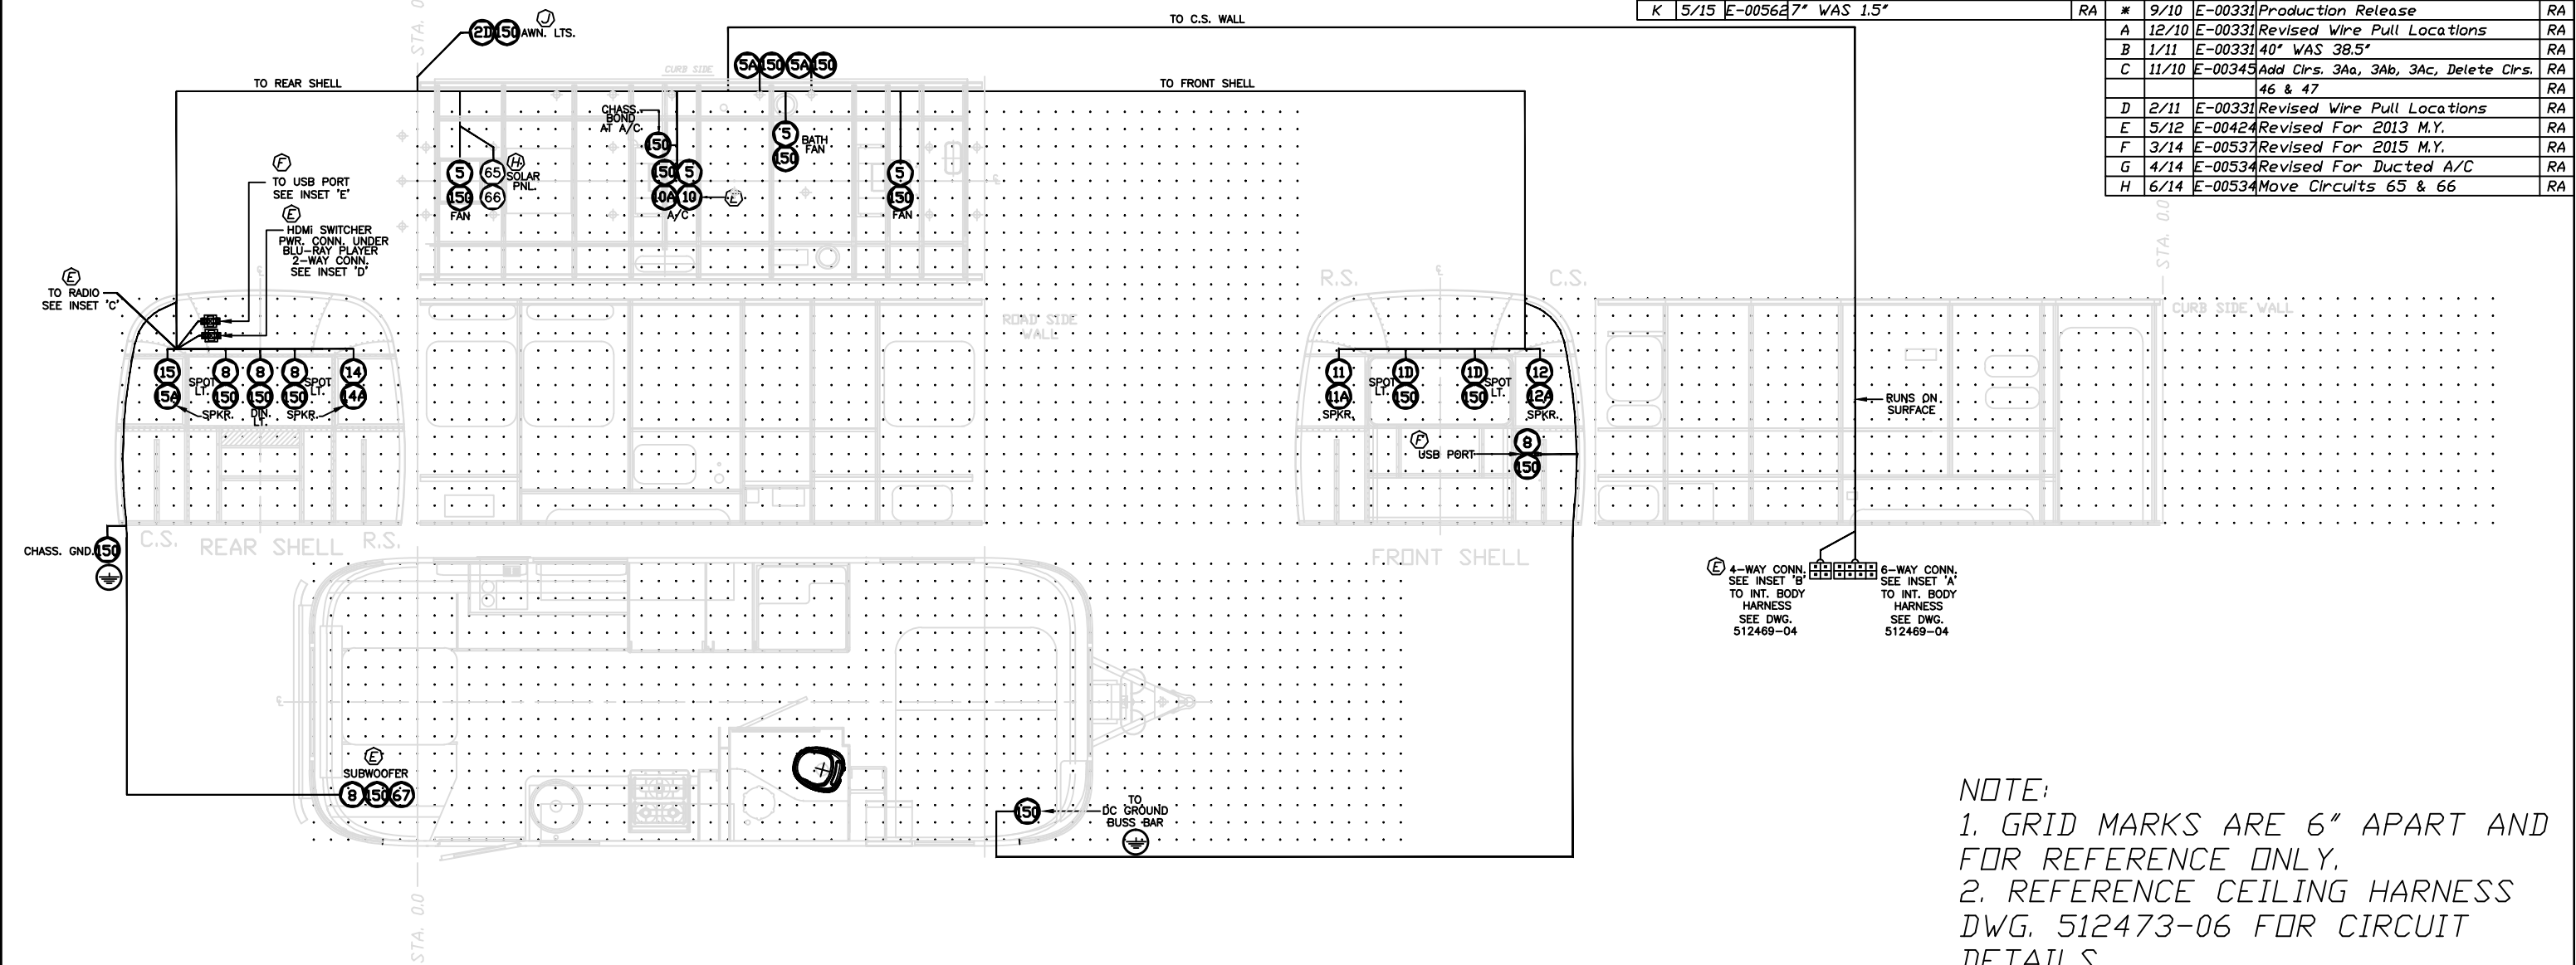

NOTE:
1. GRID MARKS ARE 6" APART AND
FOR REFERENCE ONLY.
2. REFERENCE CEILING HARNESS
DWG. 512473-06 FOR CIRCUIT
DETAILS.
3. REFERENCE SCHEMATIC DWG.
952850S2-02 FOR RADIO INSTALL
DETAILS.
4. INVERTER FUSE MUST BE
INSTALLED WITHIN 18" OF THE
INVERTER'S POSITIVE BATTERY
CABLE ENTRY INTO THE UNIT.

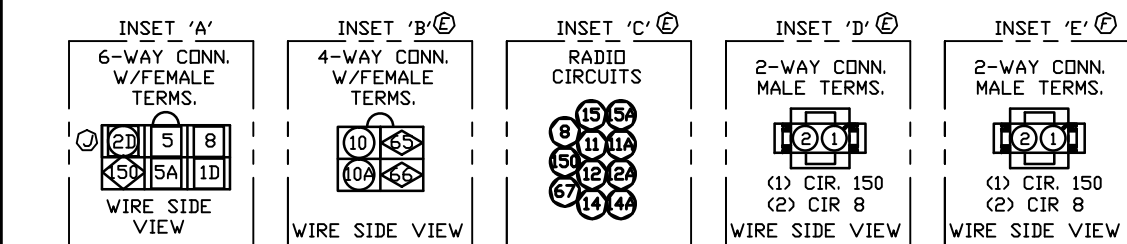

12V. LOCATION CHART

CURBSIDE						ROADSIDE					
SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR	TO C.L.	INSTALL ON OPT.	SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR	TO C.L.	INSTALL ON OPT.
E	* SAT. RECEIVER PRE-WIRE (COAX & PWR.	DIN. LKR.	#	61"	20"	*	* CABLE TV & SAT TV JACK (EXTERNAL)	-4.5"	#	12"	* *
F	* RADIO & USB PORT	DIN. LKR.	#	61"	33"	*	* TAIL LIGHT HARNESS CONNECTOR	19"	#	2"	* *
K	* SUBWOOFER PRE-WIRE (1/2" WIRE EXIT)	-18.00"	#	2"	*	*	* FURNACE	39"	#	0"	* *
H	* AWNING LIGHT WIRE PULL		#	76.5"	*	*	* LP DETECTOR	73.18"	#	6"	21.50"
B	* STEP LIGHT (EXTERNAL)	21.5"	#	72"	*	*	* TV BOOSTER JACK	74.5"	#	45.5"	* *
A	* SOLAR PANEL PREWIRE (CEILING)	26.25"	#	ON C.L.	*	*	* REFRIGERATOR	74.5"	#	12"	* *
J	* BATTERY DISCONNECT CABLE PULL	40"	#	27"	*	*	* WATER PUMP	100"	#	0"	22"
A OPT	* AWNING, CEILING, STEP LT. SW'S	40"	#	27"	*	*	* CLOSET LIGHT	100"	#	74"	* *
A	* INVERTER ON/OFF SWITCH	65"	#	46.5"	*	*	* SHOWER LIGHT	128.75"	#	*	30"
A OPT	* TANK/BAT./LP MONITOR /w PUMP SW	67"	#	58.5"	* **	*	* SEWER LIGHT & SWITCH	122"	#	-4"	* *
A	* SOLAR PANEL CONTROL PANEL	69"	#	46.5"	*	*	* THERMOSTAT	148"	#	54"	* *
D	* GALLEY SPOT & IND. LT. SW'S	67"	#	42"	*	PJ1-1	* BEDROOM CEIL'G & OVHD SW'S	148"	#	42"	21"
A	* RANGE VENT WIRES	77.25"	#	58.5"	*	*	* BEDROOM TV JACK	156"	#	59"	* *
D	* GAL. OVHD LT WIRES	95.5"	#	66"	*						
	* RS & CS CEILING HARNESS PULL	107"	#	*	30"						
	* WATER HEATER SW & BATH LIGHT SW.	108.75"	#	42"	19"						
	* WATER HEATER	163"	#	0"	*						
	* C.S. READING LT.#1	168"	#	62"	*						
E	* 12V/120V PWR. CNTR. WIRE PULL	168"	#	0"	0"						
	* FWD. COMP. LT. - COIL WIRES ON FLOOR	197.25"	#	6"	0"						
	* C.S. READING LT.#2	201"	#	62"	*						
	* INVERTER WIRE PULL	219"	#	3"	0"						
F	* USB PORT WIRE PULL - 1.19" DIA HOLE	FRONT WRAP	#	24"	28"						


CIR. COLOR CHART

	Okt.	Ga	Color	Function
	1D	12	Purple/red	Bdrfm. DvHd. Spot Lts.
	2D	14	Yellow/blk	Awning Lights
J	5	12	Blue	+12V.
	5A	12	Blue/blk	Bath Ceiling Lts.
	8	12	Gray	+12V.
	10	18	Blue	T-Stat
	10A	18	Blue/wht.	T-Stat
	11	18	Green	RS Spkr.(Rear +)
	11A	18	Green/blk.	RS Spkr.(Rear -)
	12	18	Purple	CS Spkr.(Rear +)
	12A	18	Purple/blk.	CS Spkr.(Rear -)
	14	18	White	RS Spkr.(Front +)
	14A	18	White/Blk.	RS Spkr.(Front -)
	15	18	Gray	CS Spkr.(Front +)
	15A	18	Gray/blk.	CS Spkr.(Front -)
	65	10	Yellow	Solar Panel (+)
	66	10	Green	Solar Panel (-)
	67	14	Blue/wht.	Subwoofer Remote Sw.
	150	■	White	Chassis Ground


'B' = DOUBLE BED
C.L. = CENTER LINE OF UNIT.
V = MOUNT VERTICAL
H = MOUNT HORIZONTAL

ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ± *		Airstream	DRAWN BY RUSS A.	
NEXT ASS'Y *			APPROVED BY	
		FIRST USAGE: 25' FB Int. E. Bauer TT		
TITLE 12V Loc/Route, (CS Cell)				
SCALE N.T.S.	DATE 9/24/10	DRAWING NUMBER 953010S1	D K	

LET	DATE	P.C.R.	REVISION RECORD	BY
*	9/10	E-00331	Production Release	RA
A	12/10	E-00331	Revised Wire Pull Locations	RA
B	1/11	E-00331	40" WAS 38.5"	RA
C	11/10	E-00345	Add Cirs. 3Aa, 3Ab, 3Ac, Delete Cirs. 46 & 47	RA
D	2/11	E-00331	Revised Wire Pull Locations	RA
E	5/12	E-00424	Revised For 2013 M.Y.	RA
F	3/14	E-00537	Revised For 2015 M.Y.	RA
G	6/14	E-00534	Move Solar Panel Prewire	RA

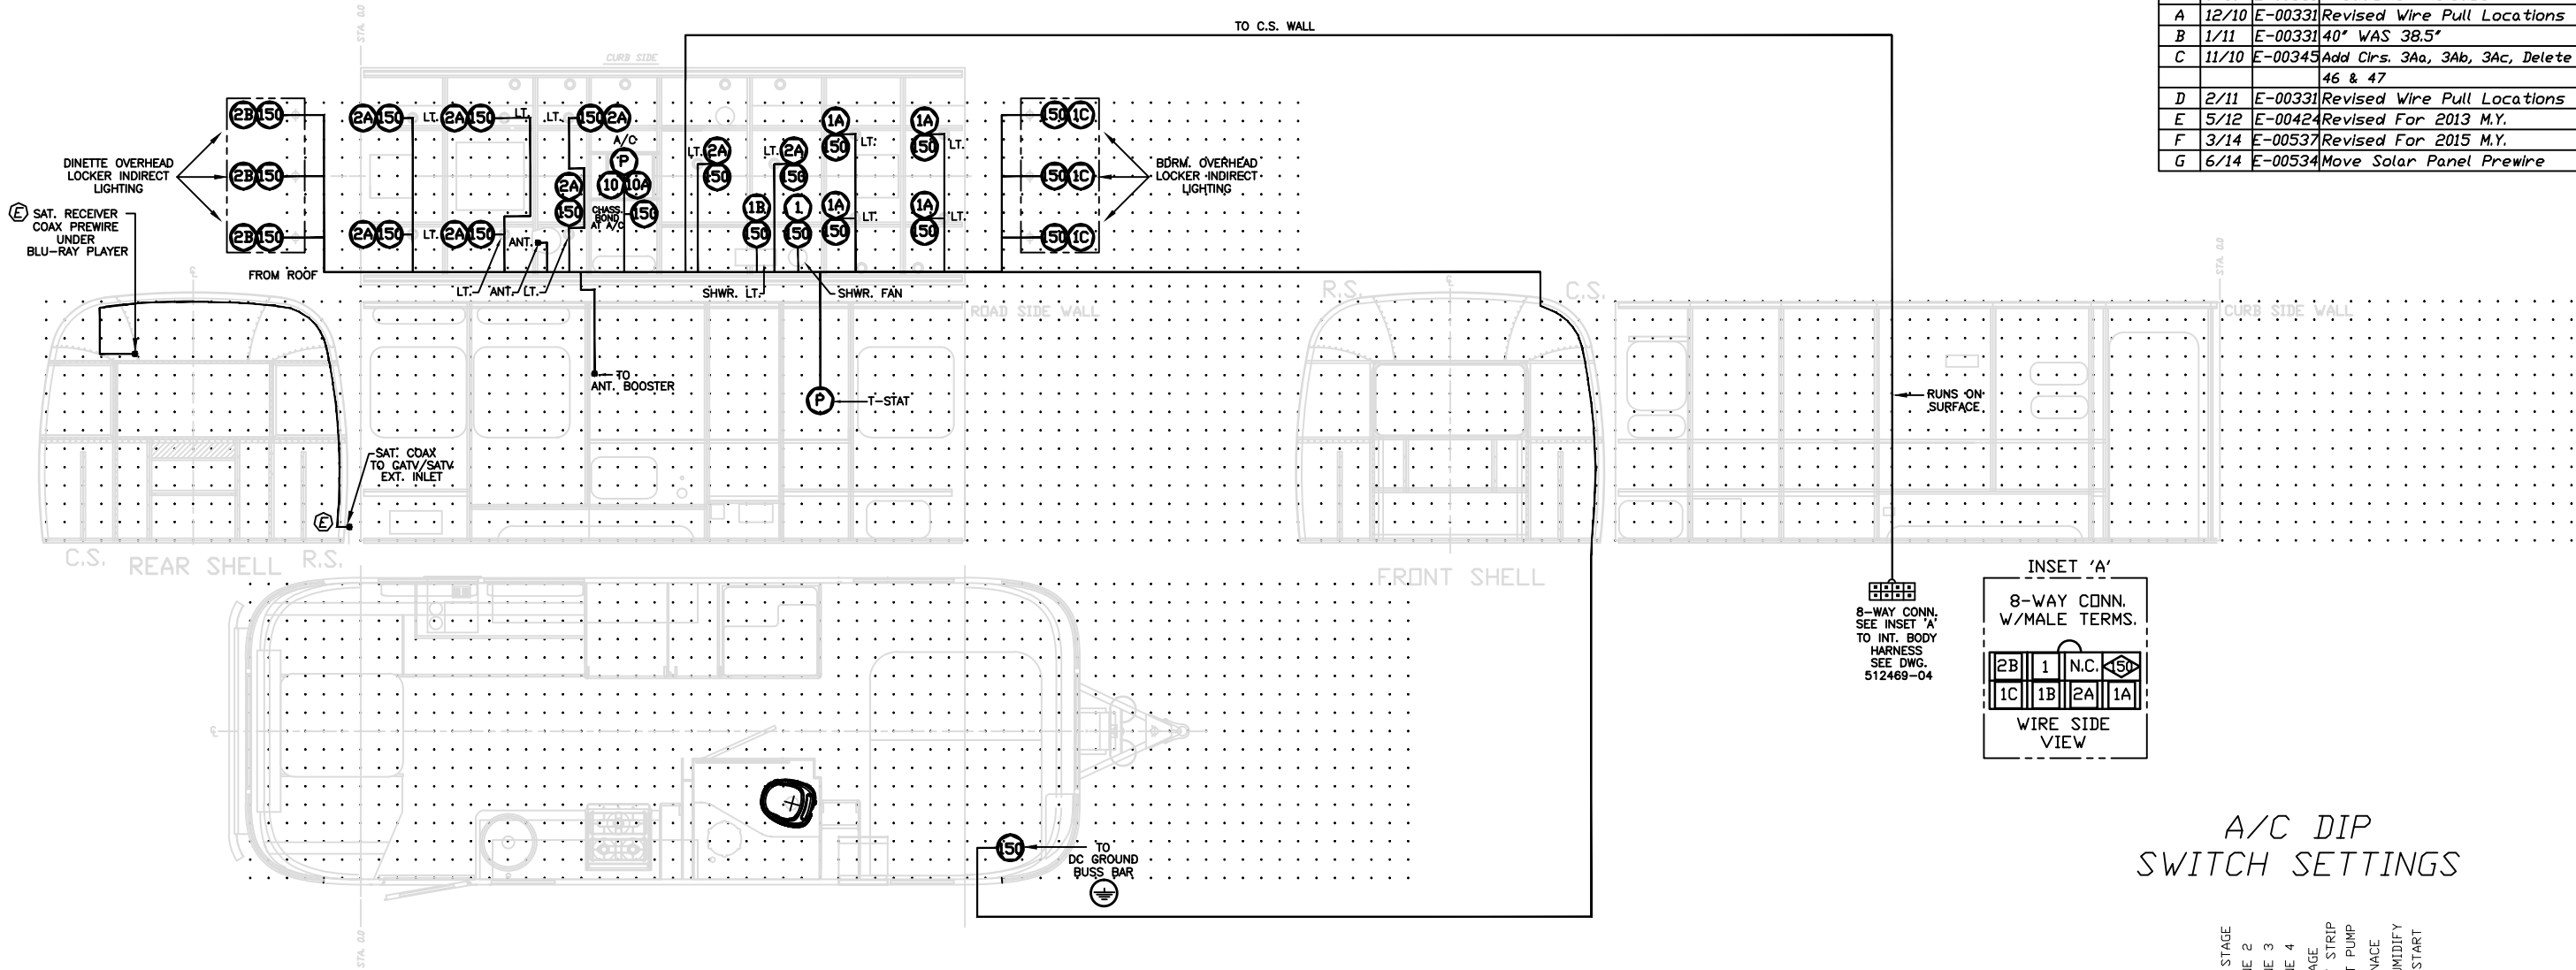

A/C DIP
SWITCH SETTINGS



NOTE:
1. GRID MARKS ARE 6" APART AND FOR REFERENCE ONLY.
2. REFERENCE CEILING HARNESS DWG. 512160-07 FOR CIRCUIT DETAILS.

12V. LOCATION CHART

CURBSIDE						ROADSIDE							
	SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR	TO C.L.	INSTALL ON OPT.		SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR	TO C.L.	INSTALL ON OPT.
F E	*	SAT. RECEIVER PRE-WIRE (COAX & PWR.)	DIN. LKR.	#	61"	20"	*	*	CABLE TV & SAT TV JACK (EXTERNAL)	-4.5"	#	12"	*
	*	RADIO & USB PORT	DIN. LKR.	#	61"	33"	*	*	TAIL LIGHT HARNESS CONNECTOR	19"	#	2"	*
	*	SUBWOOFER PRE-WIRE (1/2" WIRE EXIT)	-18.00"	#	2"	*	*	*	FURNACE	39"	#	0"	*
G	*	STEP LIGHT (EXTERNAL)	21.5"	#	72"	*	*	*	LP DETECTOR	73.18"	#	6"	21.50"
	*	SOLAR PANEL PREWIRE (CEILING)	26.25"	#	*	ON C.L.	*	*	TV BOOSTER JACK	74.5"	#	45.5"	*
	*	BATTERY DISCONNECT CABLE PULL	40"	#	27"	*	*	*	REFRIGERATOR	74.5"	#	12"	*
B A OPT	*	INVERTER ON/OFF SWITCH	65"	#	46.5"	*	*	*	WATER PUMP	100"	#	0"	22"
	*	TANK/BAT./LP MONITOR /w PUMP SW	67"	#	58.5"	*	**	*	CLOSET LIGHT	100"	#	74"	*
	*	SOLAR PANEL CONTROL PANEL	69"	#	46.5"	*	*	*	SHOWER LIGHT	128.75"	#	*	30"
A OPT	*	GALLEY SPOT & IND. LT. SW'S	67"	#	42"	*	*	*	SEWER LIGHT & SWITCH	122"	#	-4"	*
	*	RANGE VENT WIRES	77.25"	#	58.5"	*	*	*	THERMOSTAT	148"	#	54"	*
	*	GAL. OVHD LT. WIRES	95.5"	#	66"	*	*	PJ1-1	BEDROOM CEIL'G & OVHD SW'S	148"	#	42"	21"
D A	*	RS & CS CEILING HARNESS PULL	107"	#	*	30"	*	*	BEDROOM TV JACK	156"	#	59"	*
	*	WATER HEATER SW & BATH LIGHT SW.	108.75"	#	42"	19"	*						
	*	WATER HEATER	163"	#	0"	*	*						
E	*	C.S. READING LT#1	168"	#	62"	*	*						
	*	12V/120V PWR. CNTR. WIRE PULL	168"	#	0"	0"	*						
	*	FWD. COMP. LT. - COIL WIRES ON FLOOR	197.25"	#	6"	0"	*						
F	*	C.S. READING LT#2	201"	#	62"	*	*						
	*	INVERTER WIRE PULL	219"	#	3"	0"	*						
	*	USB PORT WIRE PULL - 1.19" DIA HOLE/FRONT WRAP		#	24"	28"	*						


CIR. COLOR CHART

Cir.	Ga.	Color	Function
1	12	Purple	(+)12 Volts
1A	12	Purple/wht.	Bedrm. Ceiling Lts.
1B	12	Purple/blk.	Shower Lt.
1C	12	Purple/yel.	Bdrm. Ovhd. Indirect Lts.
2	12	Yellow	(+)12 Volts
2A	12	Yellow/blk.	Main Ceiling Lts.
2B	12	Yellow/red	Din. Ovhd. Indirect Lts.
150	*	White	Chassis Ground
P	26	Gray Jacket	Phone Cable

'B' = DOUBLE BED
C.L. = CENTER LINE OF UNIT.
V = MOUNT VERTICAL
H = MOUNT HORIZONTAL

ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ± *	Airstream		DRAWN BY	RUS A
NEXT ASS'Y *	FIRST USAGE: 25' FB Int. E. Bauer TT		APPROVED BY	
TITLE	12V Loc/Route, (RS Ceil)			
SCALE N.T.S.	DATE 9/28/10	DRAWING NUMBER 953010S2	D	REV. G

LET	DATE	P.C.R.	REVISION RECORD	BY
*	9/10	E-00331	Production Release	RA
A	12/10	E-00331	Revised Wire Pull Locations	RA
B	1/11	E-00331	40' Was 38.5'	RA
C	11/10	E-00345	Add Cirs. 3Aa, 3Ab, 3Ac, Delete Cirs. 46 & 47	RA
D	2/11	E-00331	Revised Wire Pull Locations	RA
E	5/12	E-00424	Revised For 2013 M.Y.	RA
F	2/13	T-03319	REV BEDROOM CEIL'G & OVHD SW'S WAS 150"	KP
G	3/14	E-00537	Revised For 2015 M.Y.	RA
H	6/14	E-00534	Move Solar Prewire	RA
J	3/15	E-00562	Revised For 2016 M.Y.	RA
K	5/15	E-00562	7" WAS 1.5"	RA

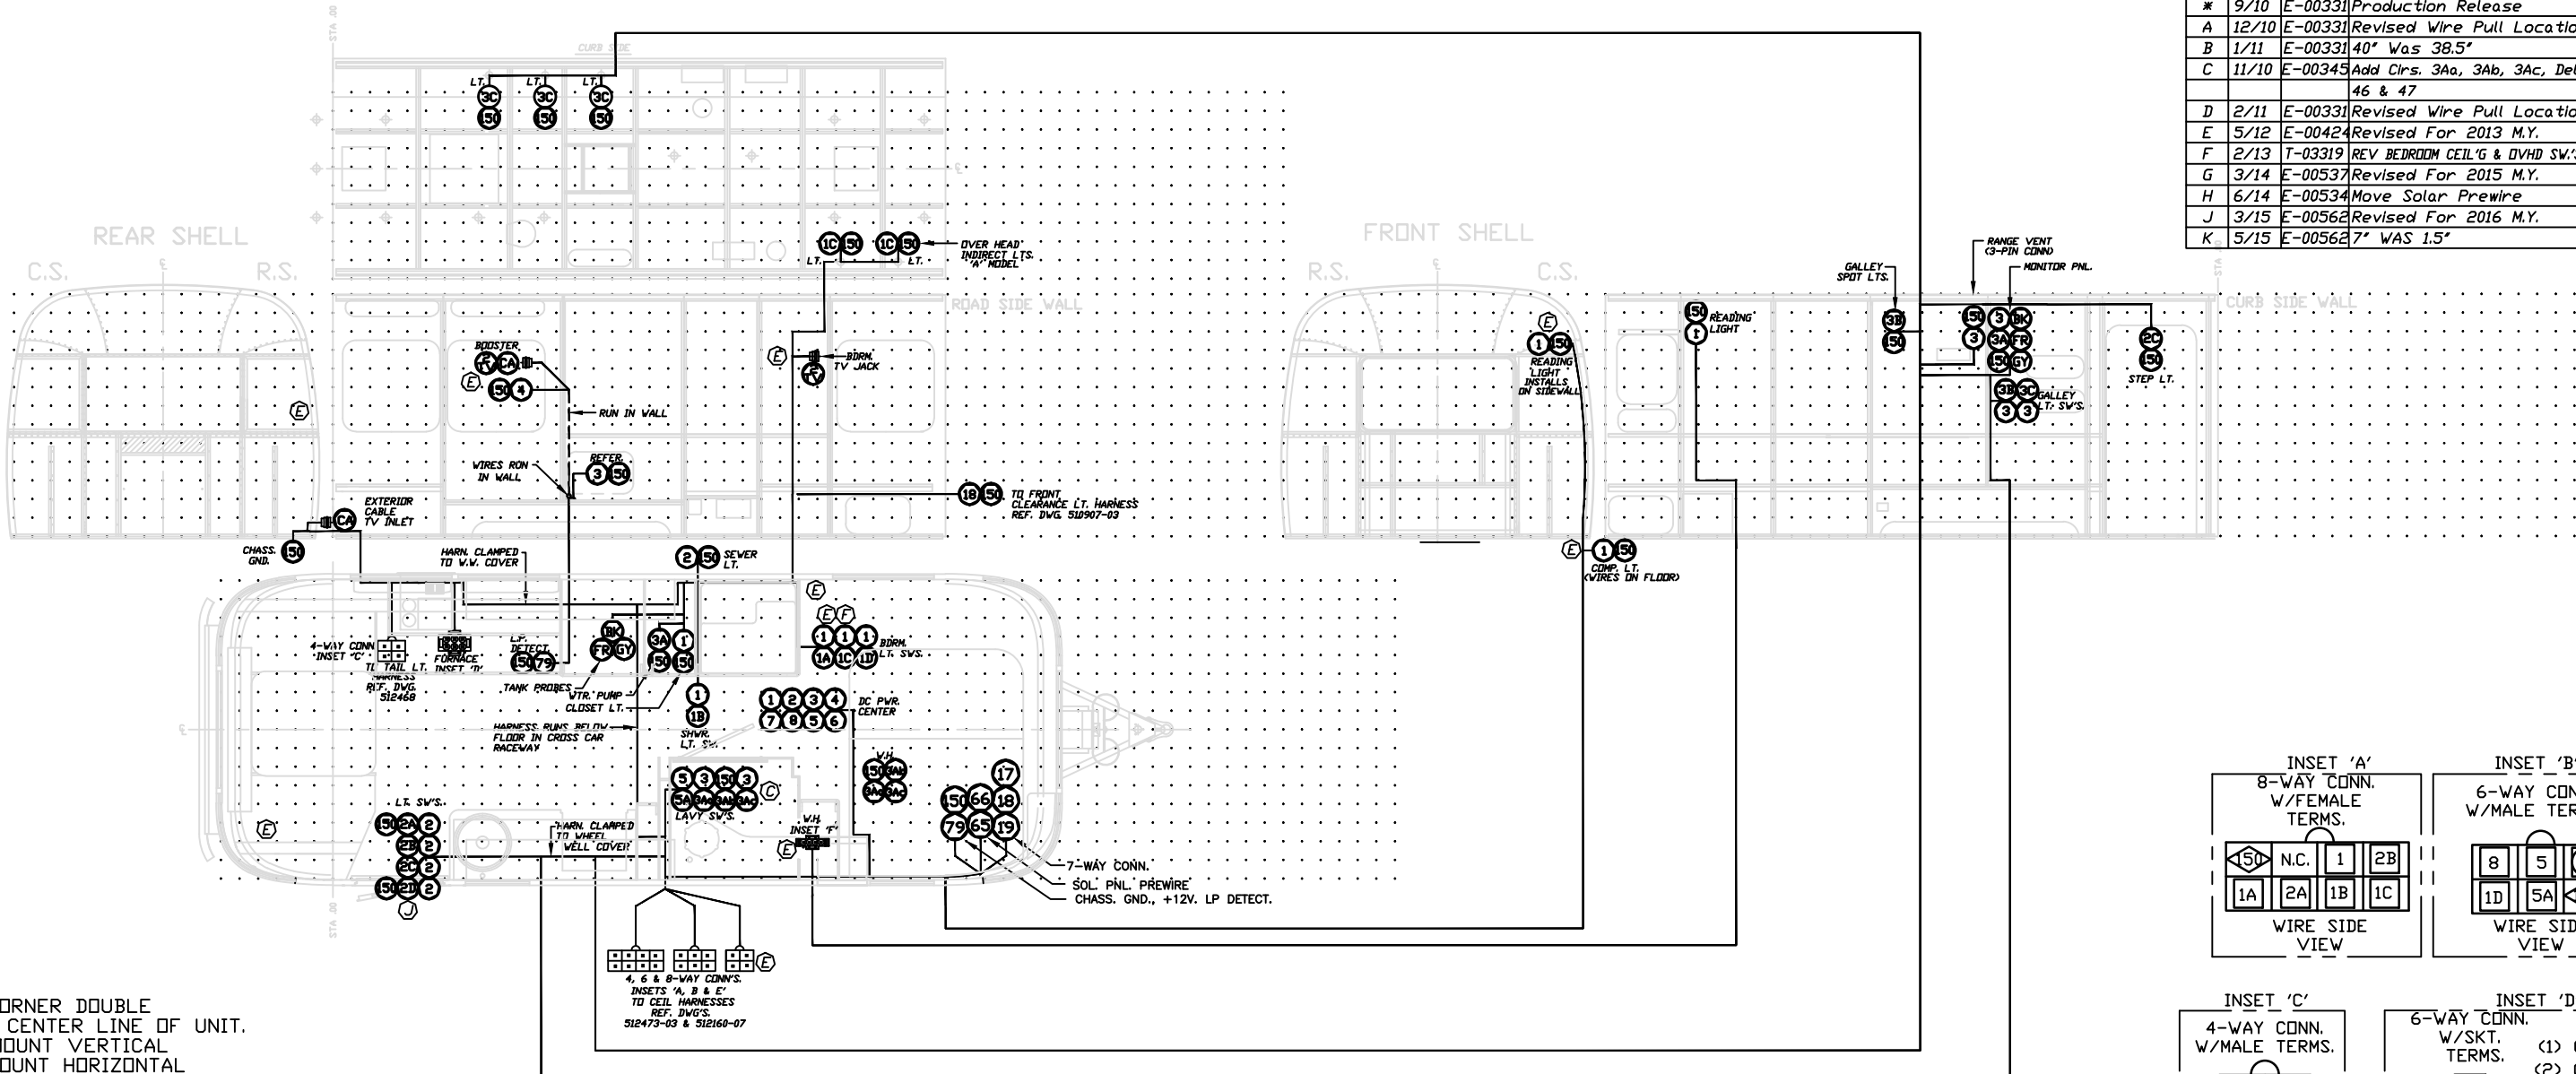

C = CORNER DOUBLE
C.L. = CENTER LINE OF UNIT.
V = MOUNT VERTICAL
H = MOUNT HORIZONTAL

NOTE:




1. GRID MARKS ARE 6" APART AND FOR REFERENCE ONLY.
2. REFERENCE BODY, INTERIOR HARNESS DWG. 512469-05 FOR CIRCUIT DETAILS.

12V. LOCATION CHART

CURBSIDE						ROADSIDE										
SYMBOL	DESCRIPTION	FROM STA. 0'	TO FLOOR	TO C.L.	INSTALL ON OPT.	SYMBOL	DESCRIPTION	FROM STA. 0'	TO FLOOR	TO C.L.	INSTALL ON OPT.					
G	E	*	SAT. RECEIVER PRE-WIRE (COAX & PWR.)	DIN. LKR.	#	61"	20"	*	CABLE TV & SAT TV JACK (EXTERNAL)	-4.5"	#	12"	*	*		
		*	RADIO & USB PORT	DIN. LKR.	#	61"	33"	*	TAIL LIGHT HARNESS CONNECTOR	19"	#	2"	*	*		
K		*	SUBWOOFER PRE-WIRE (1/2" WIRE EXIT)	-18.00"	#	2"	*	*	FURNACE	39"	#	0"	*	*		
		*	AWNING LIGHT WIRE PULL	7"	#	76.5"	*	*	LP DETECTOR	73.18"	#	6"	21.50"	*	*	
H	B	*	STEP LIGHT (EXTERNAL)	21.5"	#	72"	*	*	TV BOOSTER JACK	74.5"	#	45.5"	*	*		
		*	SOLAR PANEL PREWIRE (CEILING)	26.25"	#		ON C.L.	*	REFRIGERATOR	74.5"	#	12"	*	*		
A	A	*	BATTERY DISCONNECT CABLE PULL	40"	#	27"	*	*	WATER PUMP	100"	#	0"	22"	*	*	
		*	AWNING, CEIL., STEP, DIN. LT. SW'S.	40"	#	27"	*	*	CLOSET LIGHT	100"	#	74"	*	*		
A	OPT	*	INVERTER ON/OFF SWITCH	65"	#	46.5"	*	*	SHOWER LIGHT	128.75"	#	*	30"	*	*	
		*	TANK/BAT./LP MONITOR /w PUMP SW	67"	#	58.5"	*	**	SEWER LIGHT & SWITCH	122"	#	-4"	*	*	*	
A	OPT	*	SOLAR PANEL CONTROL PANEL	69"	#	46.5"	*	*	PT	148"	#	54"	*	*	*	
		*	GALLEY SPOT & IND. LT. SW'S	67"	#	42"	*	*	PJ1-1	148"	#	42"	21"	*	*	
D	A	*	RANGE VENT WIRES	77.25"	#	58.5"	*	*	*	BEDROOM CEIL'G & OVHD SW'S	148"	#	42"	21"	*	*
		*	GAL. OVHD LT WIRES	95.5"	#	66"	*	*	*	BEDROOM TV JACK	156"	#	59"	*	*	*
D		*	RS & CS CEILING HARNESS PULL	107"	#	*	30"	*								
		*	WATER HEATER SW & BATH LIGHT SW.	108.75"	#	42"	19"	*								
		*	WATER HEATER	163"	#	0"	*	*								
		*	C.S. READING LT#1	168"	#	62"	*	*								
E		*	12V/120V PWR. CNTR. WIRE PULL	168"	#	0"	0"	*								
		*	FWD. COMP. LT. - COIL WIRES ON FLOOR	197.25"	#	6"	0"	*								
		*	C.S. READING LT#2	201"	#	62"	*	*								
		*	INVERTER WIRE PULL	219"	#	3"	0"	*								
G		*	USB PORT WIRE PULL - 1.19" DIA HOLE	FRONT WRAP		24"	28"	*								

CIR. COLOR CHART

No.	Ga.	Color	Function	No.	Ga.	Color	Function
1	12	Purple	(+)12V. Feed	5A	12	Blue/blk.	Bath Lights
1A	12	Purple/wht.	Bdrn. Ceiling Lt.	6	12	Red	(+)12V. Feed
1B	12	Purple/blk.	Shower Lt.	7	12	Black	(+)12V. Feed
1C	12	Purple/yel.	Bdrn. Ovhd. Indir. Lts.	8	12	Gray	(+)12V. Feed
1D	12	PURPLE/red	Bdrn. Ovhd. Spot Lts.	10	18	Blue	Furnace T-Stat (+)
2	12	Yellow	(+)12V. Feed	10A	18	Blue/wht.	Furnace T-Stat (-)
2A	12	Yellow/blk.	Main Ceiling Lt.	17	14	Red	Lt. Turn & Stop
2B	12	Yellow/red	Din. Ovhd. Indir. Lts.	18	14	Green	Clr. & Tail Lts.
2C	12	Yellow/grn.	Step Lt.	19	14	Brown	Rt. Turn & Stop
2D	14	Yellow/blue	Awning Lights	65	10	Yellow	(+) From Solar Pnl.
3	12	Pink	(+)12V. Feed	66	10	Green	(-) From Solar Pnl.
3A	12	Orange/wht.	Water Pump	79	14	Black/wht.	LP Detector
3Aa	12	Orange/blk.	Water Htr. Gas Sw.	150	*	White	Chassis Ground
3Ab	12	Blue/blk.	Water Htr. Lock-out Lt.	BK	26	Black	Blk. Tank Probe
3Ac	12	White/blk.	Water Htr. Elec. Sw.	FR	26	White	Fresh Tank Probe
3B	12	PINK/blk	Galley Spot Lts.	GY	26	Gray	Gray Tank Probe
3C	12	Pink/grn.	Galley Indirect Lts.	*	*	*	*
4	12	Brown	(+)12V. Feed	*	*	*	*
5	12	Blue	(+)12V. Feed				

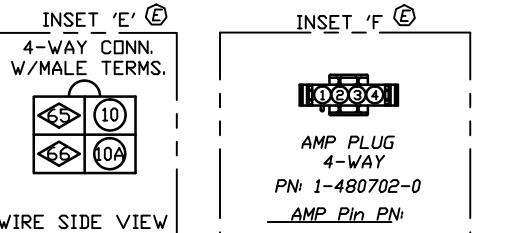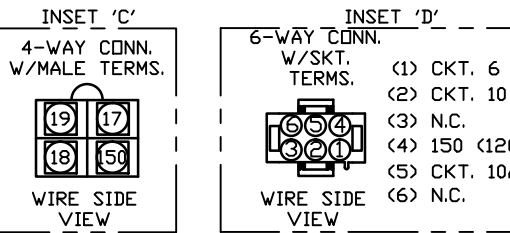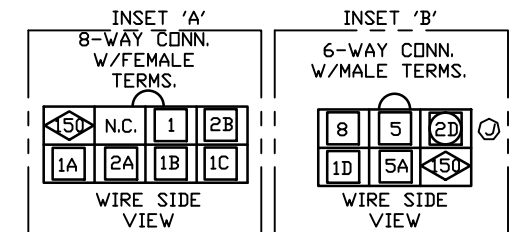


ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES *	Airstream		DRAWN BY RUSS A	
NEXT ASSY *			APPROVED BY	
TITLE		FIRST USAGE: 25' FB Int. E. Bauer TT		
12V Loc/Route, (Body Harn)				
SCALE N.T.S.	DATE 9/28/10	DRAWING NUMBER 953010S3	D	REV. K

953008


NOTE:
NON-CURRENT CARRYING METAL PARTS THAT COULD BECOME ENERGIZED BY 110 VOLT CURRENT
ARE GROUNDED BY RUNNING A GROUND PIGTAIL FROM THE BARE COPPER WIRE OF THE ROMEX
CABLE TO EITHER A GROUND SCREW OR GROUND CLIP ON THE PART.
MODEL 7355, CTL PANELBOARD, TYPE 1, MAX MAIN 30 AMPS.
INPUT: 105-130 VAC 60 Hz, 975 WATTS, UL, AND ULC.

LET	DATE	E.C.N.	REVISION RECORD	BY
*	9/10	E-00331	PRODUCTION RELEASE	RA
A	1/11	E-00345	Add Cir. 5 & GFCI Recept.	RA
B	4/11	E-00367	Add Blu-Ray Recepts.	RA

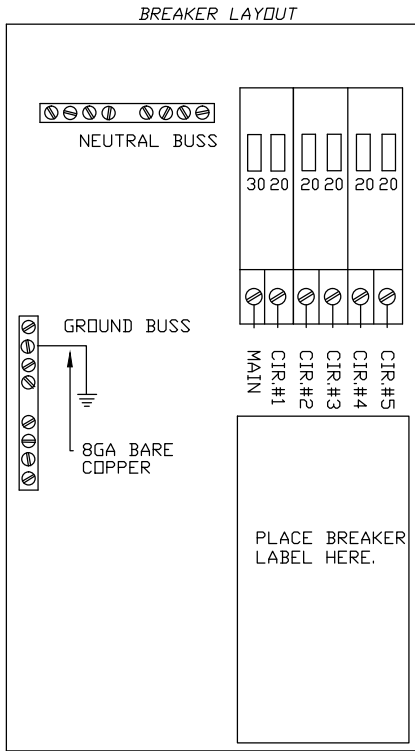

STD: BREAKER LABEL

20AMP- WATER HEATER
20AMP GFI-REFER, GALLEY, BATH, OUTSIDE,
DINETTE, BLU-RAY PLAYER RECEPT'S.
20AMP-MICRO. RECEPT.
20AMP-CONV., BEDROOM RECEPT'S
20AMP-A/C
30AMP-MAIN

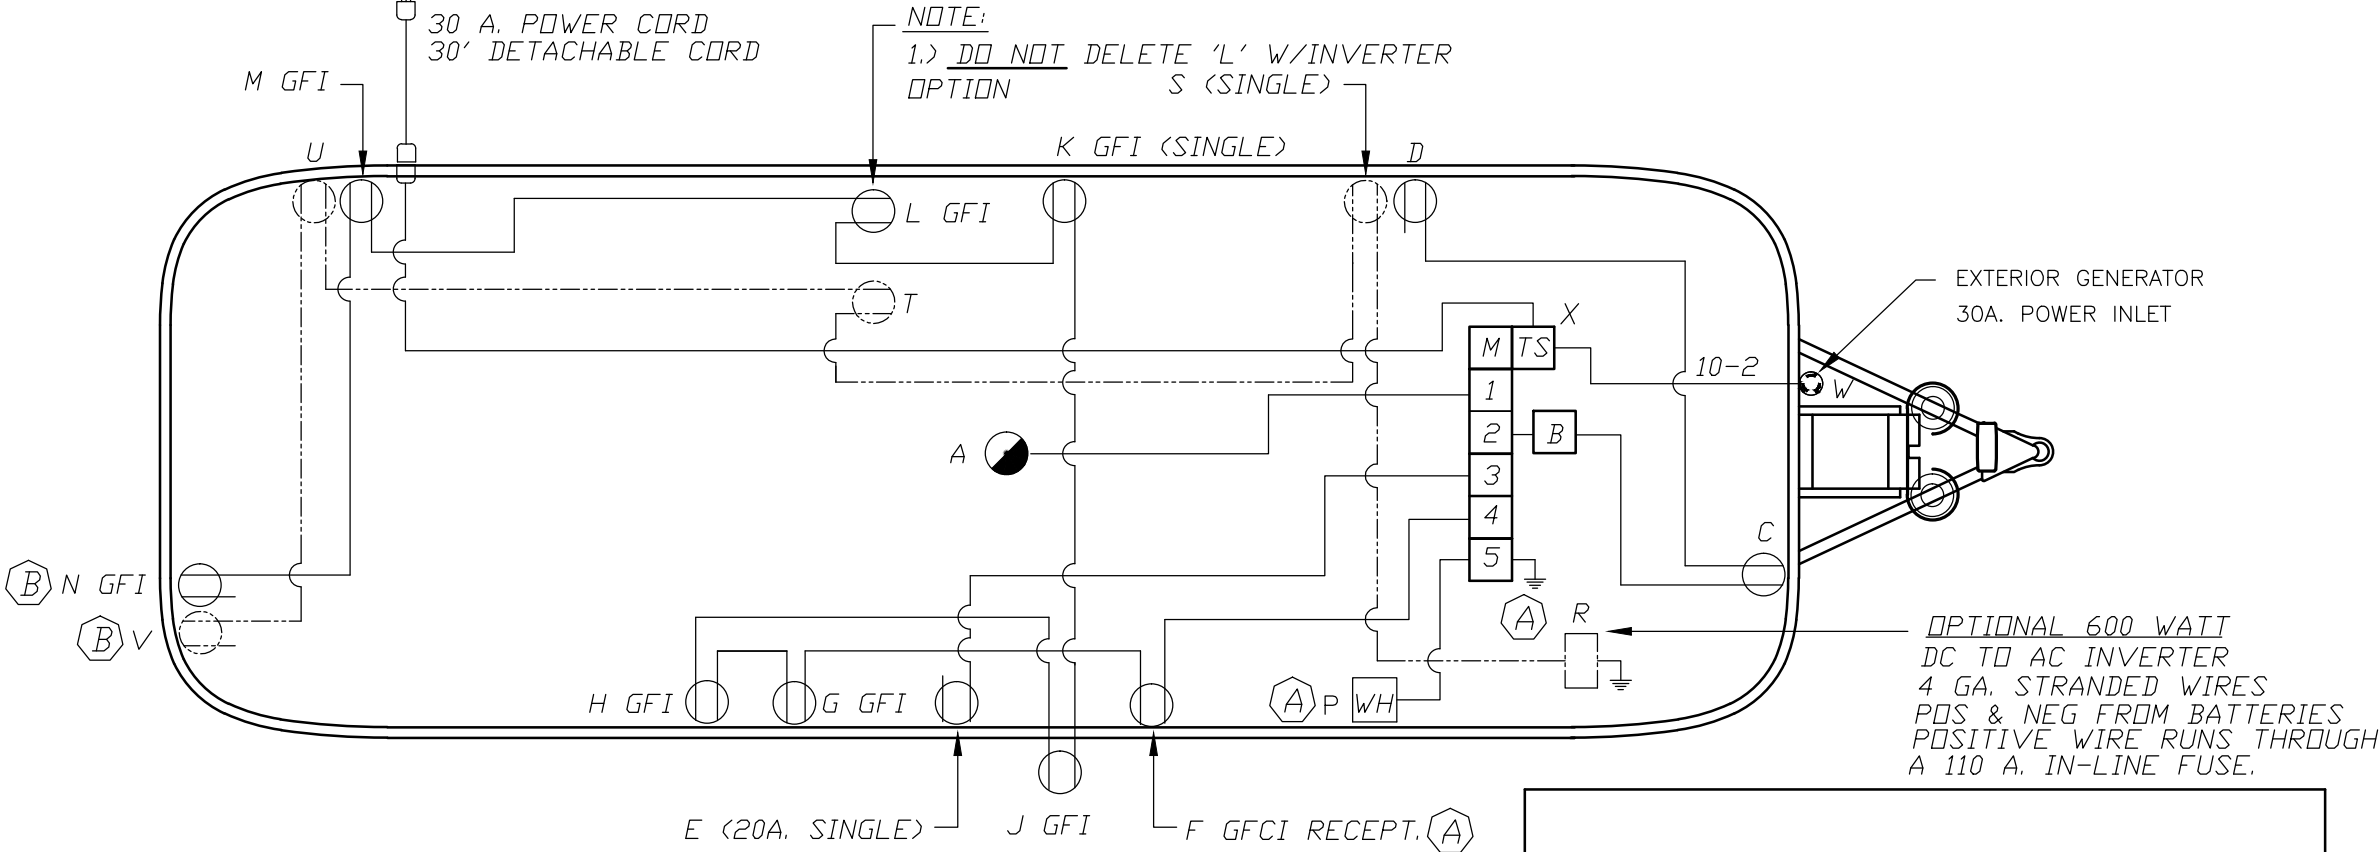

EXTERIOR GENERATOR
30A. POWER INLET

OPTIONAL 600 WATT
DC TO AC INVERTER
4 GA. STRANDED WIRES
POS & NEG FROM BATTERIES
POSITIVE WIRE RUNS THROUGH
A 110 A. IN-LINE FUSE.

MAIN, 30 AMP. HACR BREAKER, 10-2 ROMEX W/GND.

CIRCUIT 1, 20 AMP. HACR BREAKER, 12-2 ROMEX W/GND.

A. AIR CONDITIONER

16.0 AMPS.

CIRCUIT 5, 20 AMP. HACR BREAKER, 12-2 ROMEX W/GND.

P. WATER HEATER

12.0 AMPS.

CIRCUIT 2, 20 AMP. HACR BREAKER, 12-2 ROMEX W/GND.

B. CONVERTER WIRED DIRECT
C. FRONT BEDROOM RECEPT
D. ROADSIDE BEDROOM RECEPT

8.0 AMPS.

1.5 AMPS.

1.5 AMPS.

TOTAL 11.0 AMPS.

CIRCUIT 3, 20 AMP. HACR BREAKER, 12-2 ROMEX W/GND.

E. MICROWAVE RECEPT (SINGLE 20A)

12.0 AMPS.

CIRCUIT 4, 20 AMP. HACR BREAKER, 12-2 ROMEX W/GND.

F. BATH (GFCI) RECEPT.
G. GALLEY RECEPT
H. GALLEY END PANEL RECEPT
J. OUTSIDE RECEPT.
K. REFER RECEPT (SINGLE)
L. LOUNGE AREA TV RECEPT

1.5 AMPS.

1.5 AMPS.

1.5 AMPS.

1.5 AMPS.

2.7 AMPS.

1.5 AMPS.

M. ROADSIDE REAR RECEPT
N. BLU-RAY PLAYER RECEPT

1.5 AMPS.

1.5 AMPS.

TOTAL 12.2 AMPS.

5 A. DC TO AC INVERTER CIRCUIT

R. 600 WATT INVERTER, 7 A. CIRCUIT BREAKER,
TRANSFER SWITCH RATED AT 10 A, UL 458 TESTED, ULC
LISTED, WIRE TO RECEPTS IS 12-2 ROMEX W/GND.

S. INVERTED BEDROOM TELEVISION RECEPT (SINGLE)
T. INVERTED TELEVISION RECEPT. (SINGLE)

U. INVERTED ROADSIDE REAR RECEPT.
V. INVERTED BLU-RAY PLAYER RECEPT.

REMOTE GENERATOR CIRCUIT, 10-2 ROMEX W/GND.

W. 30 AMP. POWER INLET
X. 30 AMP. TRANSFER SWITCH UL - CSA RATED
(ATTACHED TO BACK OF POWER CENTER)

ITEM	PART NUMBER	DESCRIPTION	QTY	UM
TOLERANCES ± *	Airstream		DRAWN BY RUSS A	
NEXT ASS'Y *			APPROVED BY	
		PRODUCT LINE 25' FB Int. E. Bauer TT		
TITLE 120VAC LAYOUT - USA				
SCALE NTS	DATE 9/23/10	DRAWING NUMBER 953008		REV. B