
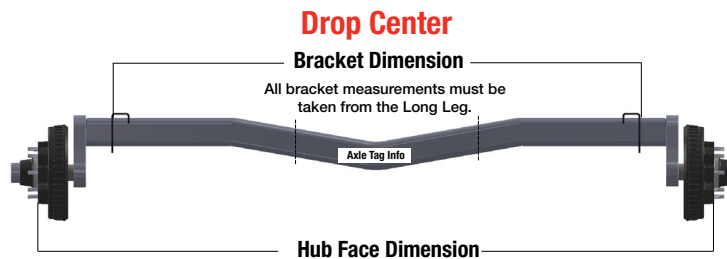
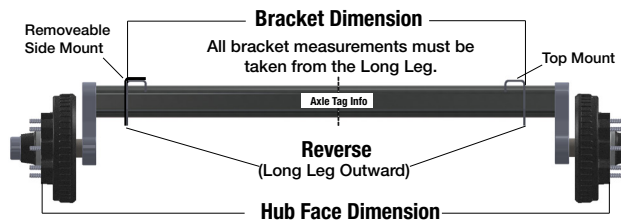



Date: _____ Account # _____
 Account Name: _____
 Contact Person: _____
 Phone: () _____
 Customer Signature: _____
Capacity: _____ **Quantity:** _____
Hub Face: _____ **Outside of Brackets:** _____
Axle Type: Beam Only Idler Brake Axle
Brake Flange (Beam & Idler): _____
Bearing Lubrication
 Grease Oil E-Z Lube® Nev-R-Lube®
Cambered: Yes No **OR** Drop Center
Start Angle:
 22.5° Up 10° Down
 10° Up 22.5° Down
 0° 32° Down
 45° Down
Brake Type:
 Electric Single Servo Hydraulic
 Nev-R-Adjust® Electric Duo Servo Hydraulic
 Disc Hydraulic Free Backing Hydraulic
Park: _____
Removable Spindle: _____
Wheel Bolt Pattern: _____
Stud Size: 1/2" 9/16" 5/8" Flgd. 5/8" Coned/Clamp Ring
 Swivel Flange Nut (10K & 12K)
Idler: (2K 5 on 4.50) 5.50" Diameter Hub 6.50" Diameter Hub
Mounting Brackets: Low 1" High 3" High (2.2K & 3.5K)
Side Mounting Kit: Yes No
Side Mount Hangers: Steel Aluminum
Bracket Orientation: Standard Reverse
Pre-wired: Yes No
Axle Finish: No-Paint Paint Powder Coat
 E-Coat Galvanized
Notes: _____

IN CASE OF CUSTOMER ERROR:



Dexter builds axles to order per customer specifications. Please be sure all dimensions and specifications are correct. Axles are subject to a 50% restock fee if returned & the customer is responsible for all freight charges incurred for the original shipment & return. Some combinations may not work pending on options chosen or may not apply.

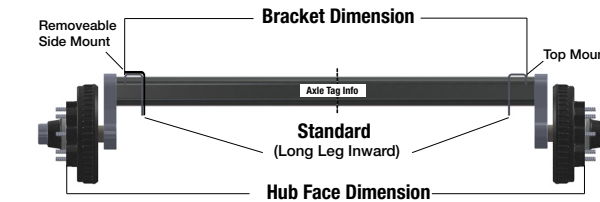

Bracket Orientation

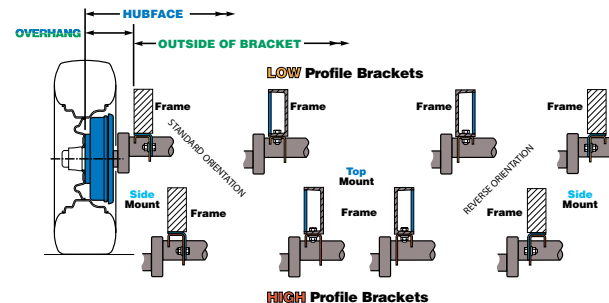


Bracket Profile

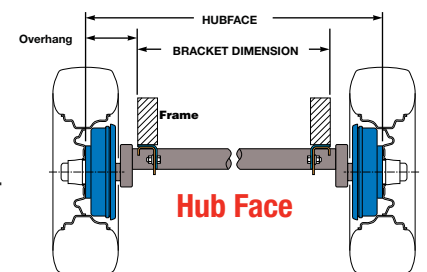


600 - 12,000 LBS. CAPACITY

Start Angle
(measure when unloaded)

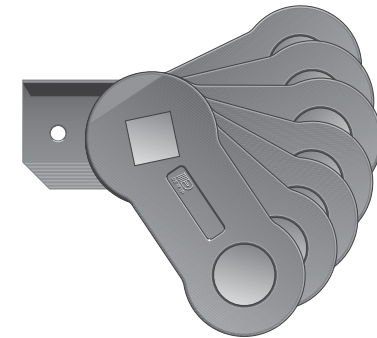

22.5° Up
 10° Up
 0°
 10° Down
 22.5° Down
 32° Down
 45° Down

Forward

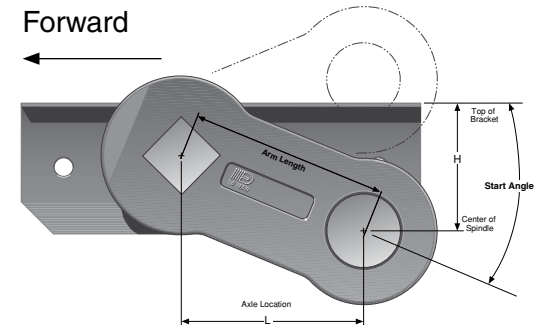

Albion, IN
Elkhart, IN
Fremont, IN
El Reno, OK
Monticello, GA

Fax: (260)-636-5387 or E-mail:
 Fax: (574)-293-7093 or E-mail:
 Fax: (260)-495-1701 or E-mail:
 Fax: (405)-262-9089 or E-mail:
 Fax: (706)-468-2966 or E-mail:

