


Installing an Exterior Satellite on Your Airstream 2012 - Present

*Note: Most units will require a HDMI 4X2 powered splitter/switcher box to complete this process.
Airstream offers Part # 512552 available through any Authorized Airstream Dealer.*

Step 1: Locate your exterior satellite hookup on the road side of your coach




Step 2: Connect your coax from your exterior satellite to the coax connection labelled "SAT"

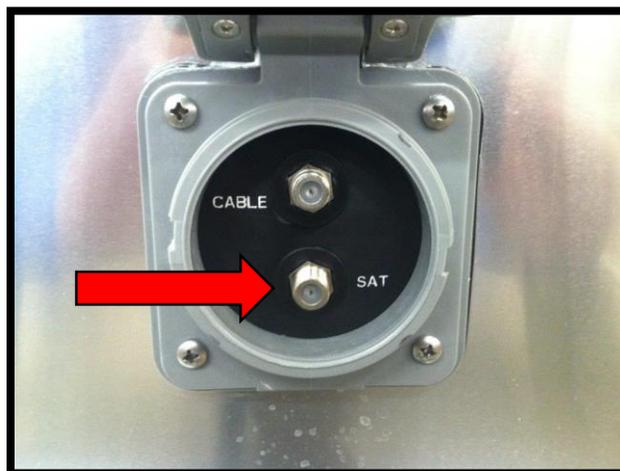


Step 3: Locate the Blu Ray box on the interior of the unit




Step 4: Disconnect the Blu Ray player and remove the 3 phillips head screws in the Blu Ray box and remove the box. Some models may have the box attached with velcro as well.

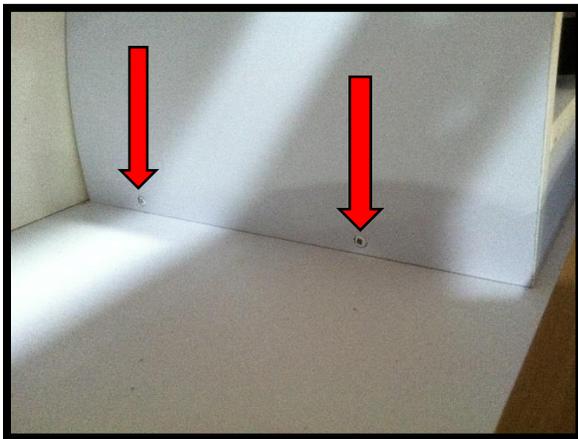

Step 5: Locate the coax cable (usually coiled underneath the Blu Ray box or inside the opening next to it). This is the feed from your exterior satellite hook up. Connect this to the input connection on your satellite box.

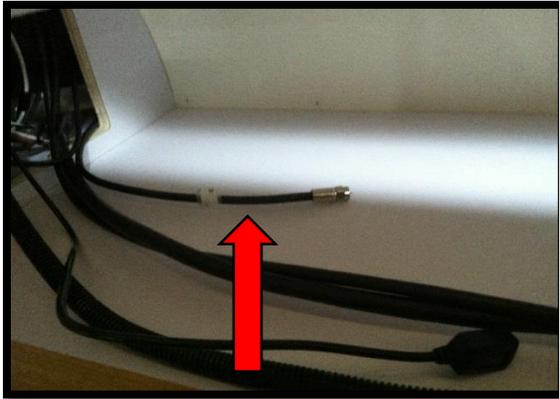


Step 6: Locate the 1X2 HDMI Splitter inside the roof locker. Disconnect the HDMI cables from the splitter, label which is output 1 (main TV) and output 2 (bedroom TV). Remove the splitter. The HDMI that was conencted to the input side goes to the Blu Ray player.

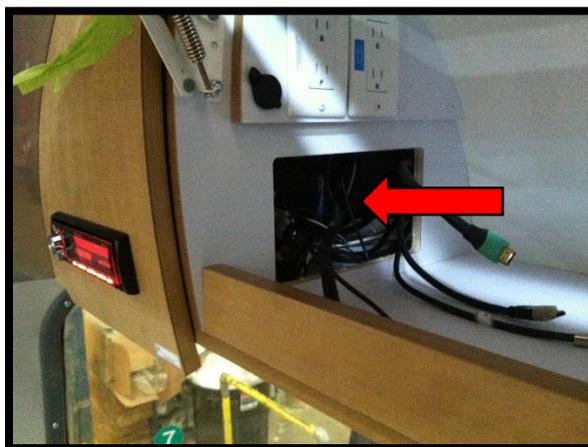

Note: If your unit only has 1 TV it WILL NOT have an HDMI Splitter. The output HDMI from the Blu-Ray will run directly to the TV. This will become the output for your new HDMI splitter and you will need new HDMI cables for your Blu-Ray and Satellite Inputs.

Step 7: Hook up your 4x2 HDMI splitter as shown below

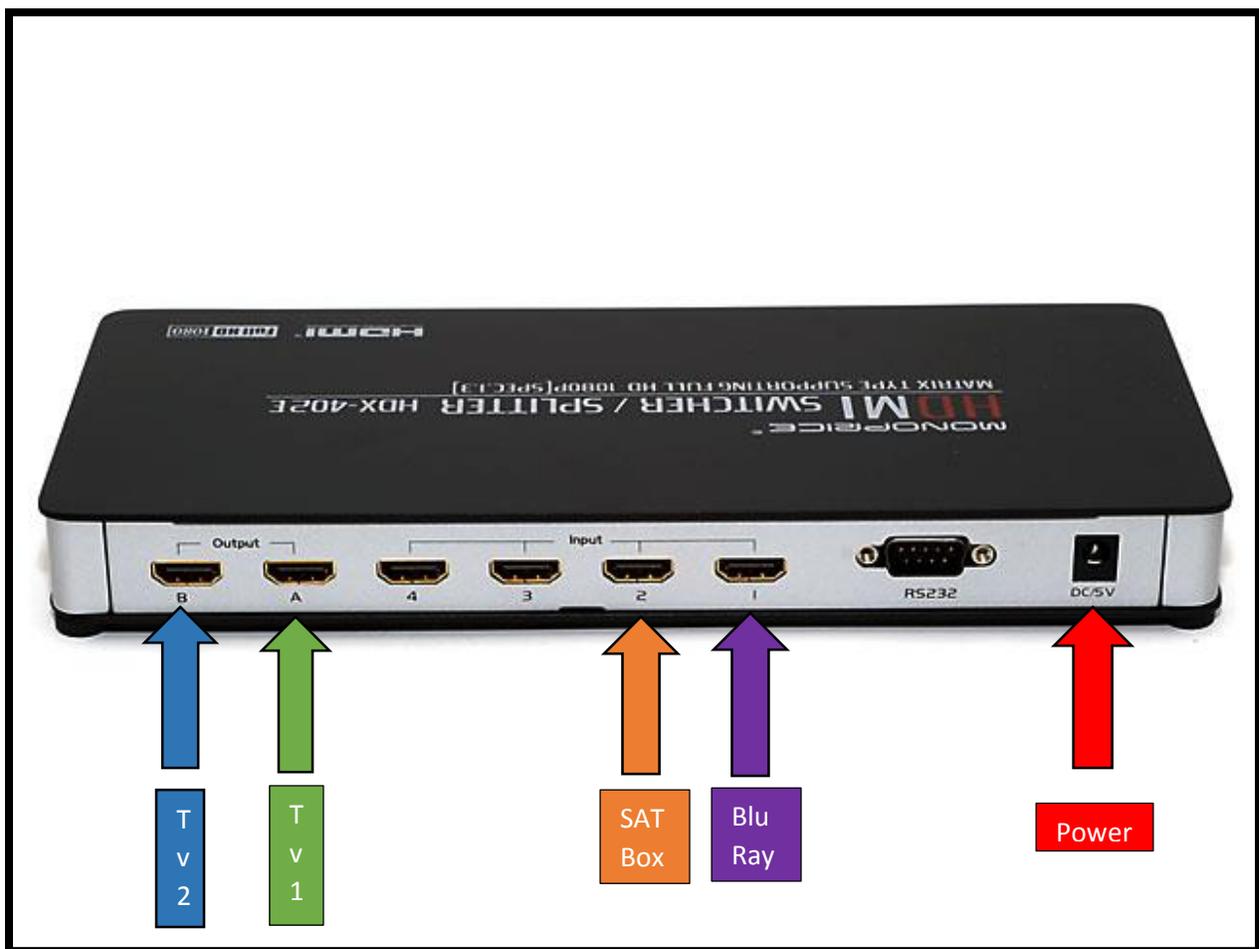

Note: Since this unit is a 4 in, 2 out splitter, the other 2 inputs can be used for other entertainment devices that use HDMI hook-ups such as, video game consoles, HD cameras, DVD players, etc. See page 6 for a diagram of how the HDMI switcher/splitter works.

Step 8: Connect the switcher/splitter to the desired power source. The unit can be used with 12V power by plugging the gray/white cable with the white connector (in the roof locker behind the radio where the 1X2 HDMI splitter was located) into the plug with the white connector provided with the HDMI switcher/splitter (pictured below) or plugged into a regular wall outlet with the 110V plug also provided with the HDMI switcher/splitter (pictured below).



Step 9: Reattach the wooden box housing the Blu Ray player. The new HDMI switcher/splitter will need to be mounted in a place where it is accessible to switch sources via the remote. You can now use the switcher/splitter to pick which source (Blu-Ray, Satellite, etc.) you would like to use and on which TV (Living Room or Bedroom) you would like to view the source.

Diagram of HDMI Switcher/Splitter

