


Hickory RV Extruded Aluminum Step



Every journey begins with
a Hickory Step

HSM
Specialty Manufacturing


Single Rise Extruded Aluminum Step

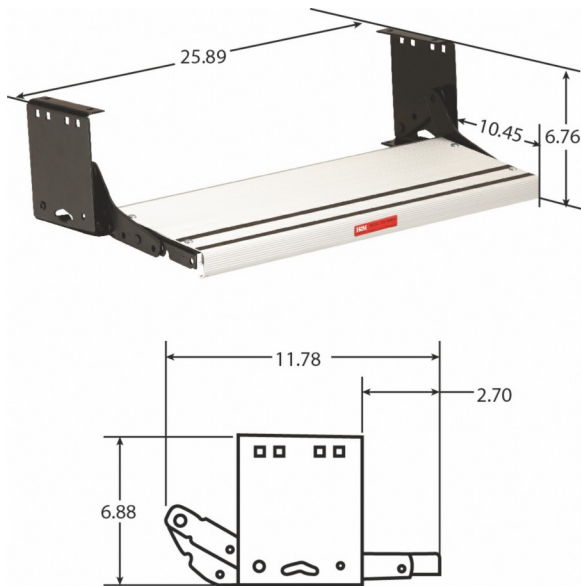

"B" End Plates



- ❖ Lightweight Marine Grade Aluminum
- ❖ Anodized tread surface to resist discoloration
- ❖ Step Tread Dimensions are 24" wide and 8-3/4" deep
- ❖ Ribbed Tread surface improves traction and offers secure footing
- ❖ Two strips of grit tape improves overall traction
- ❖ Mounting Bracket Dimensions
 - "B" End Plate: 25.89" wide X 5.75" deep
- ❖ Drop / Rise: 6.73"
- ❖ Weight capacity dependent upon 3 factors:
 - Location of installation area
 - Capacity of installation area
 - Materials used for installation
- ❖ 1-Year limited warranty

Double 7" and 9" Rise Extruded Aluminum Step

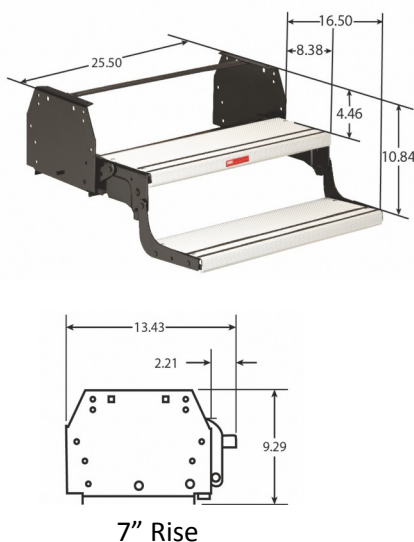

7" Rise

- ❖ Lightweight Marine Grade Aluminum
- ❖ Anodized tread surface to resist discoloration
- ❖ Step Tread Dimensions are 24" wide and 8-3/4" deep
- ❖ Ribbed Tread surface improves traction and offers secure footing
- ❖ Two strips of grit tape improves overall traction
- ❖ Mounting Bracket Dimensions
 - 7" Rise: 25.50" wide X 12.00" deep
 - 9" Rise: 27.50" wide X 12.00" deep
- ❖ Drop / Rise: 6.5" standard and 9" High Rise
- ❖ Weight capacity dependent upon 3 factors:
 - Location of installation area
 - Capacity of installation area
 - Materials used for installation
- ❖ 1-Year limited warranty

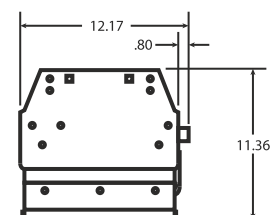
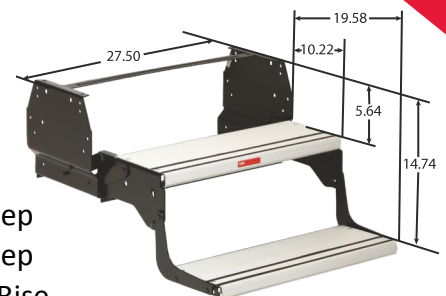


9" Rise

Singles
Doubles


Triple 7" & 9" Rise Extruded Aluminum Step

- ❖ Lightweight Marine Grade Aluminum
- ❖ Anodized tread surface to resist discoloration
- ❖ Step Tread Dimensions :
24" wide and 8-3/4" deep
- ❖ Ribbed Tread surface improves traction and offers secure footing
- ❖ Two strips of grit tape improves overall traction
- ❖ Mounting Bracket Dimensions
 - 7" Rise: 27.50" wide X 12.00" deep
 - 9" Rise: 27.50" wide X 12.00" deep
- ❖ Drop / Rise: 6.5" standard and 9" High Rise
- ❖ Weight capacity dependent upon 3 factors:
 - Location of installation area
 - Capacity of installation area
 - Materials used for installation
- ❖ 1 Year Limited Warranty

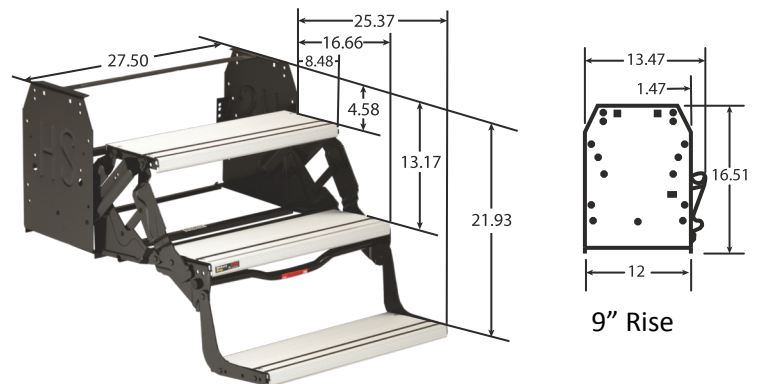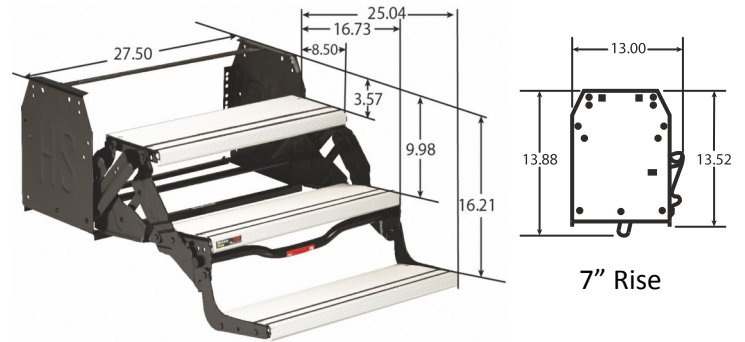

Quad Extruded Aluminum Step

- ❖ Lightweight Marine Grade Aluminum
- ❖ Anodized tread surface to resist discoloration
- ❖ Step Tread Dimensions:
24" wide and 8-3/4" deep
- ❖ Ribbed Tread surface improves traction and offers secure footing
- ❖ Two strips of grit tape improves overall traction
- ❖ Mounting Bracket Dimensions:
27.50" wide X 12.00" deep
- ❖ Drop / Rise: 7.0"
- ❖ Weight capacity dependent upon 3 factors:
 - Location of installation area
 - Capacity of installation area
 - Materials used for installation
- ❖ 1 Year Limited Warranty

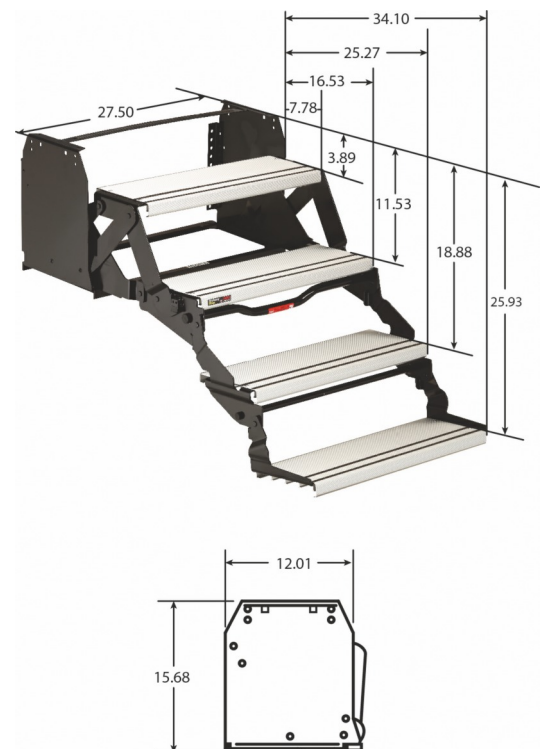

Triples

Quads



HSM Transportation and Specialty Manufacturing - Hickory RV Step
2601 Northland Drive, Elkhart, IN 46514
Tel. (574)264-9636 | Fax (574) 262-0814
www.hickoryrvsteps.com

HSM
Specialty Manufacturing