


95286332

LET	DATE	P.C.R.	REVISION RECORD	BY
M	2/15	E-00562	REVISED FOR 2016 M.Y.	RA
N	5/15	E-00562	7" WAS 15"	RA
P	8/15	E-00581	REVISED FOR 2016.5 M.Y.	RA
R	7/16	T-03518	TV JACK 16713, 4613 WAS 169, 30	NB
T	11/17	T-04534	REV CIRC 65-66, & INSET A	JG
U	12/19	E-02844	BUNK OPTION	JG

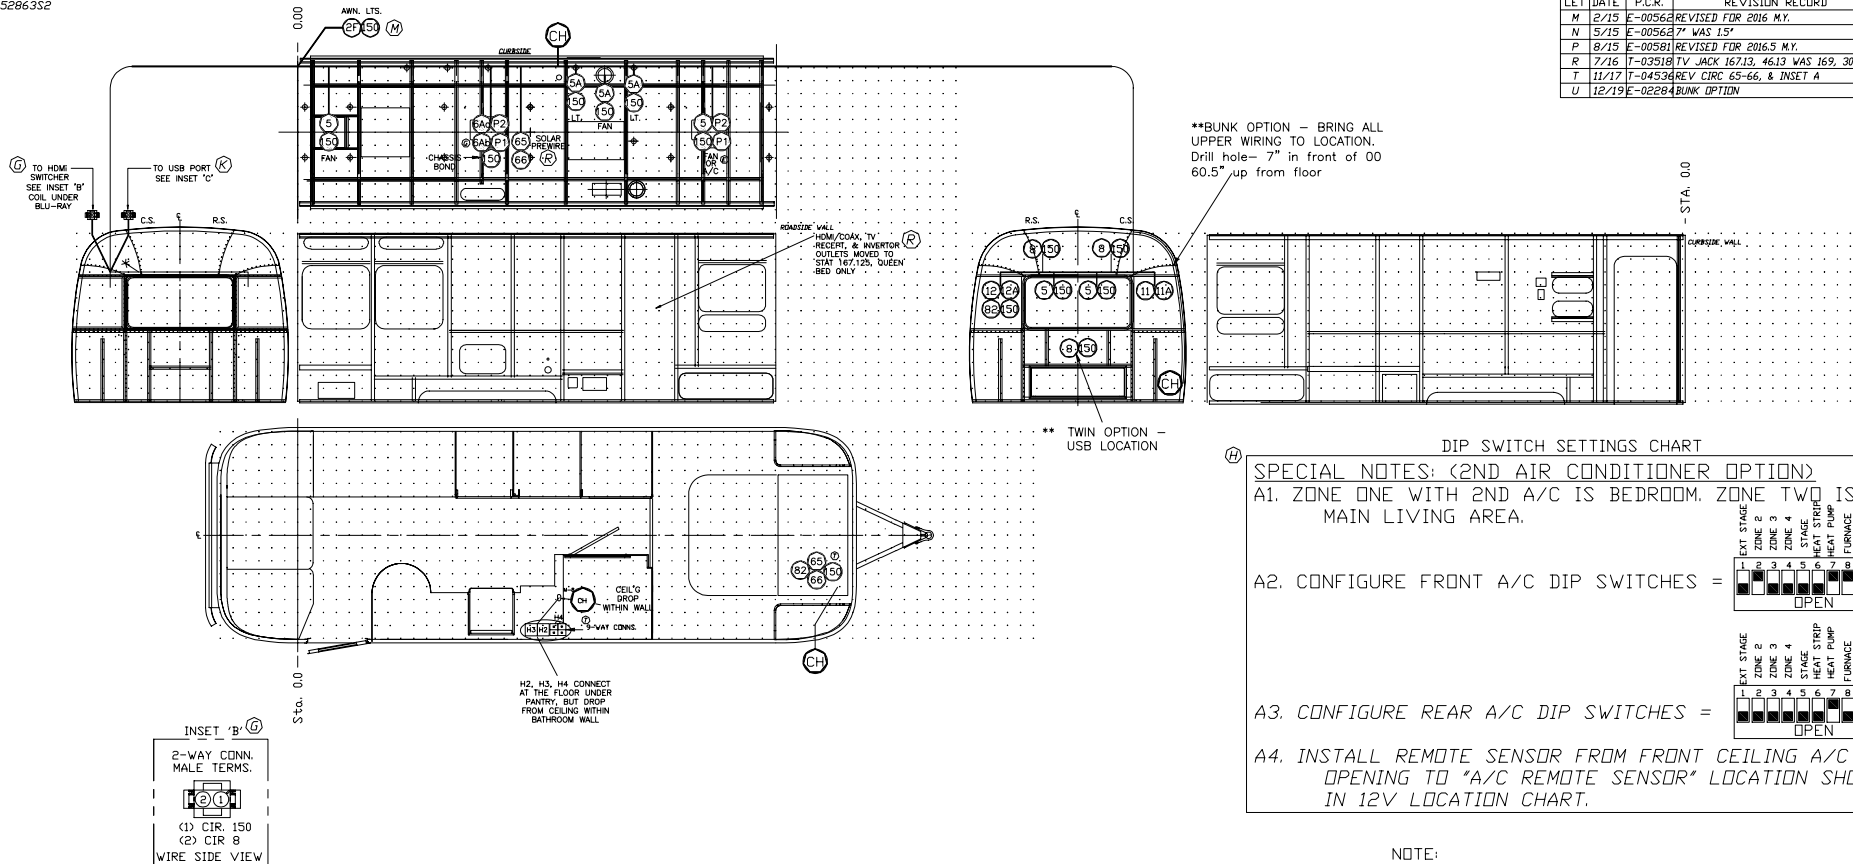

12V. LOCATION CHART

CIR. COLOR CHART

		CURBSIDE							ROADSIDE				
	SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR C.L.	TO MOUNT	INSTALL		SYMBOL	DESCRIPTION	FROM STA '0'	TO FLOOR C.L.	TO MOUNT	INSTALL
	(F)	SATELLITE COAX CABLE, 3' COIL	61"	34"				(F)	SATELLITE COAX CABLE, 3' COIL	61"	34"		
	(K)	RADIO & USB PORT	61"	34"				(K)	RADIO & USB PORT	61"	34"		
SE	7-1	SUBWOOFER PRE-WIRE (1FT TAIL)	61"	34"				7-1	SUBWOOFER PRE-WIRE (1FT TAIL)	61"	34"		
Y	(N)	6-3 SCORING LT	45"	53"	34"	H SERENITY		(N)	6-3 SCORING LT	45"	53"	34"	H SERENITY
	(H)	2B-1 AIRING LIGHT WIRE PULL (EXTERNAL SKIN)	75"	76.5"				(H)	2B-1 AIRING LIGHT WIRE PULL (EXTERNAL SKIN)	75"	76.5"		
	(H)	BATTERY DISCONNECT WIRE PULL	28"	18"				(H)	BATTERY DISCONNECT WIRE PULL	28"	18"		
	(H)	PRK WIN. OIL MODULE 12V. WIRE PULL	46"	22.5"		A, J, W		(H)	PRK WIN. OIL MODULE 12V. WIRE PULL	46"	22.5"		A, J, W
	(H)	(30, 30) GAL. INDIC./SPOT LT. SW.	69"	40.25"		A, J, W		(H)	(30, 30) GAL. INDIC./SPOT LT. SW.	69"	40.25"		A, J, W
	(H)	TANK/BAT./A.C. MONITOR & PUMP SW.	69"	50.5"		A, J, W		(H)	TANK/BAT./A.C. MONITOR & PUMP SW.	69"	50.5"		A, J, W
OPT	(H)	SOLAR PANEL CONTROL PANEL	69"	50.5"				(H)	SOLAR PANEL CONTROL PANEL	69"	50.5"		
	(H)	INVT-1 INVERTER CONTROL PANEL	69"	45.25"				(H)	INVT-1 INVERTER CONTROL PANEL	69"	45.25"		
	(H)	RANGE VENT & GAS LNS. (WIRE EXIT)	86"	58.75"				(H)	RANGE VENT & GAS LNS. (WIRE EXIT)	86"	58.75"		
	(H)	STOVE PIEZO LIGHTER	90"					(H)	STOVE PIEZO LIGHTER	90"			
	(H)	GALLEY LOCKER LIGHT	101"	62"		A, J, W		(H)	GALLEY LOCKER LIGHT	101"	62"		A, J, W
	(H)	SOLAR PNL. PREWIRE	103.75"	62"		ON GL		(H)	SOLAR PNL. PREWIRE	103.75"	62"		ON GL
	(H)	H2, H3, H4 C/S/Z/S. CEILING HARN. (CEIL'G DROP)	131"	25"				(H)	H2, H3, H4 C/S/Z/S. CEILING HARN. (CEIL'G DROP)	131"	25"		
	(H)	SP4-1 RADIO SPEAKER (CEIL'G)	201.5"	CEIL'G 118.63"				(H)	SP4-1 RADIO SPEAKER (CEIL'G)	201.5"	CEIL'G 118.63"		
	(H)	SP3-1 RADIO SPEAKER (OVHD)						(H)	SP3-1 RADIO SPEAKER (OVHD)				
	(H)	USB PORT (5" FORWARD OF RADIO SPEAKER) FRONT LKR.	60"	39"				(H)	USB PORT (5" FORWARD OF RADIO SPEAKER) FRONT LKR.	60"	39"		
	(H)	BUNK OPTION WIRE EXIT SKIN	228"	60.5"		BUNK		(H)	BUNK OPTION WIRE EXIT SKIN	228"	60.5"		BUNK

C.L. = CENTER LINE OF UNIT.

EXT. STAGE	GA	COLOR	FUNCTION
1	12	Yellow/blue	Bedroom Locker Indirect Lights
2	14	Yellow/oro	Airing Lights
3	12	Blue	+12V.
4	10	Blue/blk	Bath Ceiling Lts.
5	18	Blue	Thermostat
6	18	Blue/whit.	Thermostat
7	12	Black	+12V.
8	12	Gray	+12V.
9	18	Green	CS Spkr (Rear -)
10	18	Purple	RS Spkr (Rear -)
11	18	Purple/blk	RS Spkr (Rear -)
12	18	White	CS Spkr (Front -)
13	18	White/blk	RS Spkr (Front -)
14	18	Gray	RS Spkr (Front -)
15	18	Gray/blk	RS Spkr (Front -)
16	8	Yellow	Solar Panel (+)
17	8	Green	Solar Panel (-)
18	14	Blue/whit.	Subwoofer Remote Sw.
19	16	Orange	Connected pre-wire router feed
20	8	White	Chassis Ground
21	8	Gray	Dist. Btm. A/C Phone Cable
22	8	Gray	A/C T-Stat Extension Phone Cable

NOTE:
 1) GRID MARKS ARE 6" APART AND FOR REFERENCE ONLY.
 2) RECEPT. OR DEVICE IS LOCATED IN OTHER ASSEMBLY.
 3) REFERENCE CEILING HARNESS DWG. 512208-11 FOR CIRCUIT DETAILS.

4) STANDARD A/C DIP SWITCH SETTINGS =

EXT. STAGE	ZONE 2	ZONE 3	ZONE 4	STAGE	HEAT STRIP	FURNACE	REHUMIDIFY	DEHUMIDIFY	HEAT PUMP	DEHUMIDIFY	HEAT PUMP
1											
2											
3											
4											
5											
6											
7											
8											
9											
10											

2 OF 3 SHEETS

ITEM	PART NUMBER	DESCRIPTION	QTY	U/M
TOLERANCES ± #		Airstream		
NEXT ASS'Y #		FIRST USAGE: 27" FB INTERNATIONAL		
TITLE		12V. LOC/ROUTE (CS CEIL)		
SCALE	DATE	DRAWING NUMBER	REV.	
N.T.S.	10/9/06	95286332	D	U