



# Dexter Torsion Axle Form



Today's Date

Sold To

Customer Acct #

Ship To


Branch

CSR

SO#

Customer PO #

Ship Via

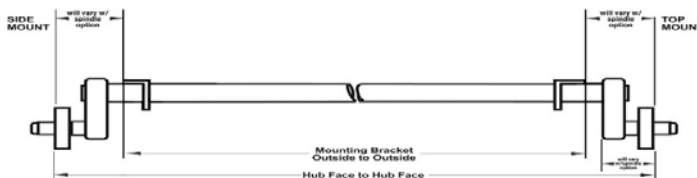

## Axle Capacity:

Type

☐ #8 600-1.1k  
☐ #9 1-2.2k

☐ #10 2.2-3.5k  
☐ #11 5.5-6k

☐ #12 5.5-7k  
☐ #13 7-8k  
☐ #13GD 9-10k  
☐ #13HD 9-10k

☐ #14T 10k  
☐ #14 12k  
☐ #12AG 5.5-7k  
☐ #13AG 8k

☐ #13HAG 9-10k  
☐ Triple Addon

**Rated Capacity:** \_\_\_\_\_

## Axle Options:

Spindle Type

☐ Short

☐ Long

☐ Removable

Bracket Type

☐ Standard

☐ Reverse

☐ Featherlite ☐ Airstream

☐ RTR

☐ Double

Bracket Height

☐ Low Profile

☐ 1" High Profile

☐ 3" High Profile

Beam Finish

☐ Paint

☐ Galvanized

☐ Powder Coat

Bracket Mounting

☐ Top Mount (No AP Kit)

☐ Side Mount Steel (AP Kit)

☐ Side Mount Aluminum (AP Kit)

Airflex

☐ Yes

☐ No

Camber

☐ Full

☐ Half

☐ None

Drop Center (V-Camber)

☐ Yes

☐ No

☐ No

## Measurements:

**Hub Face** \_\_\_\_\_

**Outside of Bracket** \_\_\_\_\_

## Degree of Arm

☐ 10Up

☐ 10Down

☐ 32Down

☐ 22.5Up

☐ 22.5Down

☐ 45Down

☐ 0



## Hub Options:

☐ Beam Only

☐ Electric Manual Adjust

☐ Single Servo Hydraulic

☐ Idler (No Brakes No Flange)

☐ Duo Servo Hydraulic

☐ Hydraulic Freebacking Marine

☐ Idler Flanged (No Brakes)

☐ Hydraulic Freebacking

☐ Add Parking Brake

☐ Electric Self Adjust

☐ Hydraulic Disc

**Bolt Pattern** \_\_\_\_\_

**2k Idler Hub Diameter (545)**

☐ 5.5" (8"-12" Wheel)

☐ 6.5" (12"-15" Wheel)

Stud Size

☐ 1/2"

☐ 9/16"

☐ 5/8" Coned

☐ 5/8" Flanged

Lube

☐ Grease

☐ EZ-Lube

☐ Nev-R-Lube

☐ Oil

Wiring Addon

☐ 33" Wire

☐ 32" Braided Sleeve

☐ Conduit Wire Protector

☐ 12' Wire

Notes: \_\_\_\_\_

PLEASE DOUBLE CHECK THE MEASUREMENTS AND ADVISE US OF ANY CORRECTIONS. I VERIFY THAT THE AXLE(S) INDICATED ABOVE ARE CORRECT AND ACKNOWLEDGE THAT ALL SPECIAL ORDER AXLES ARE NON-REFUNDABLE AND MAY REQUIRE A DEPOSIT.

Quantity: \_\_\_\_\_

Customer Signature (required): \_\_\_\_\_